

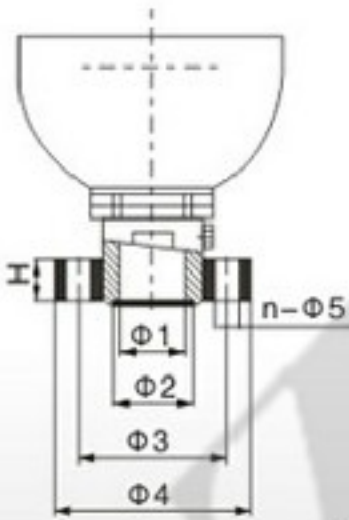


型号说明(国际)Model Designations(GB)

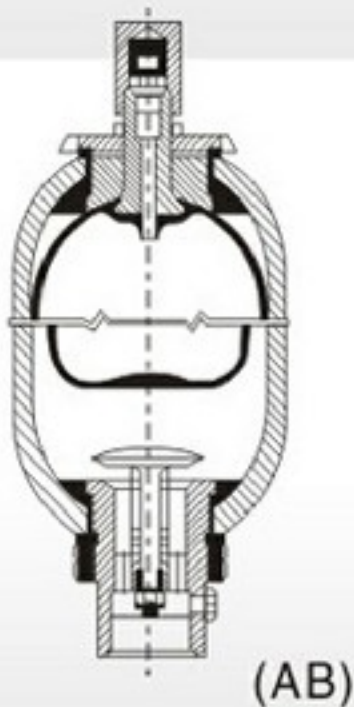

- ① 液压囊式蓄能器
 Hydraulic Bladder Accumulator
- ② 结构型式 Structure;
 A: small opening小口, AB: big opening大口
- ③ 公称容积(L) Nominal Capacity
- ④ 公称压力(MPa) Nominal Pressure
- ⑤ 连接型式 Connection type
 L-螺纹连接 thread
 F-法兰连接 flanged
- ⑥ 工作介质 Medium
 Y-液压油 Hydraulic oil
 R-乳化液 Emulsion

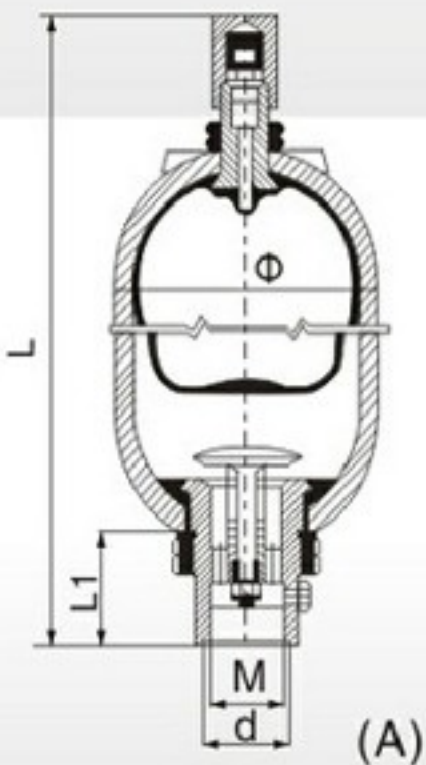

(法兰连接 Flanged)



型号与尺寸(国标) Model and Size(GB)

型号 Model	公称 压力 Nominal Pressure (MPa)	公称 容积 Nominal Volume (L)	尺寸 Size(mm)										连接方式 Connection Type		Φ	重量 (kg) Weight
			M	d	Φ1	Φ2	Φ3	Φ4	n-Φ5	L1	H		螺纹 Thread	法兰 Flanged		
													L			
NXQ-*-0.4/*-L(F)-*	10	0.4	M27×2	/	22	30	85	115	4-Φ17	52	22		260	270	89	3
NXQ-*-0.63/*-L(F)-*		0.63											315	325		3.5
NXQ-*-1/*-L(F)-*		1											430	440		4.5
NXQ-*-1/*-L(F)-*		1											330	340	114	5
NXQ-*-1.6/*-L(F)-*		1.6	M42×2	50	42	50	97	130	6-Φ17	66	28		365	380	152	11
NXQ-*-2.5/*-L(F)-*		2.5											430	445		14
NXQ-*-4/*-L(F)-*		4											540	555		16
NXQ-*-6.3/*-L(F)-*		6.3											710	725		22
NXQ-*-10/*-L(F)-*		10	M60×2	70	55	65	125	160	6-Φ21	90	32		650	665	219	38
NXQ-*-16/*-L(F)-*		16											860	875		51
NXQ-*-20/*-L(F)-*		20											985	1000		58
NXQ-*-25/*-L(F)-*		25											1160	1175		68
NXQ-*-32/*-L(F)-*	20	32											1400	1415	299	82
NXQ-*-40/*-L(F)-*		40											1680	1695		98
NXQ-*-20/*-L(F)-*		20											680	695		80
NXQ-*-25/*-L(F)-*		25											770	785		90
NXQ-*-40/*-L(F)-*		40											1050	1065		118
NXQ-*-50/*-L(F)-*		50											1230	1245		138
NXQ-*-63/*-L(F)-*		63	M72×2	80	70	80	150	200	6-Φ26	106	40		1470	1485		171
NXQ-*-80/*-L(F)-*		80											1810	1825		213
NXQ-*-100/*-L(F)-*		100											2190	2205		253
NXQ-*-150/*-L(F)-*		150											3125	3140		335
NXQ-*-63/*-L(F)-*	31.5	63											1170	1185	351	170
NXQ-*-80/*-L(F)-*		80											1395	1410		206
NXQ-*-100/*-L(F)-*		100											1660	1675		250
NXQ-*-125/*-L(F)-*		125	M85×2	95	83	95	170	230	6-Φ26	110	40		1990	2005		304
NXQ-*-150/*-L(F)-*		150											2310	2325		356
NXQ-*-160/*-L(F)-*		160											2450	2465		379
NXQ-*-180/*-L(F)-*		180											2700	2715		420
NXQ-*-200/*-L(F)-*		200											2980	2995		466

■ 简介 Brief Introduction

本系列胶囊在NXQ系列使用中，起着储存能量、稳定压力、补偿容量、吸收脉冲等多种作用。本系列胶囊符合HG2331标准。本系列胶囊具有耐油、耐酸碱、耐屈挠、变形小、强度高等特点。
 During the using of the NXQ series accumulator, this series of the bladder plays the role of storing energy, stablity the pressure, compensating the capacity and absorbing the pulse. The series of the bladder is consistent with HG2331 standards, and it has the characteristics of resistanting oil, acid and flexing, small deformation, high strength etc.



■ 型号说明 Model Designations




- ① 胶囊容量/Bladder volume: 0.4–100L
- ② 胶囊长度/Bladder length: 74–1880mm
- ③ 结构形式/Structure type: A型/A Type

■ 技术参数 Technical data

公称压力/Nominal pressure
 10、20、31.5MPa
 适用介质/Medium
 胶囊内：氮气；胶囊外：液压油和乳化液
 In the bladder: nitrogen; outside the bladder: hydraulic oil or emulsion




蓄能器抱箍
Accumulator hoop

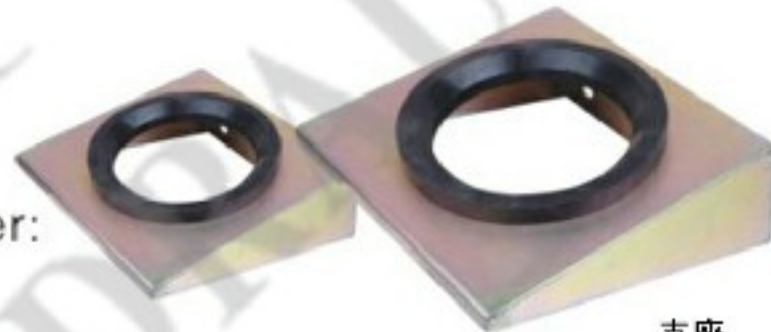

支座
Pedestal

■ 外形尺寸 Overall Dimension

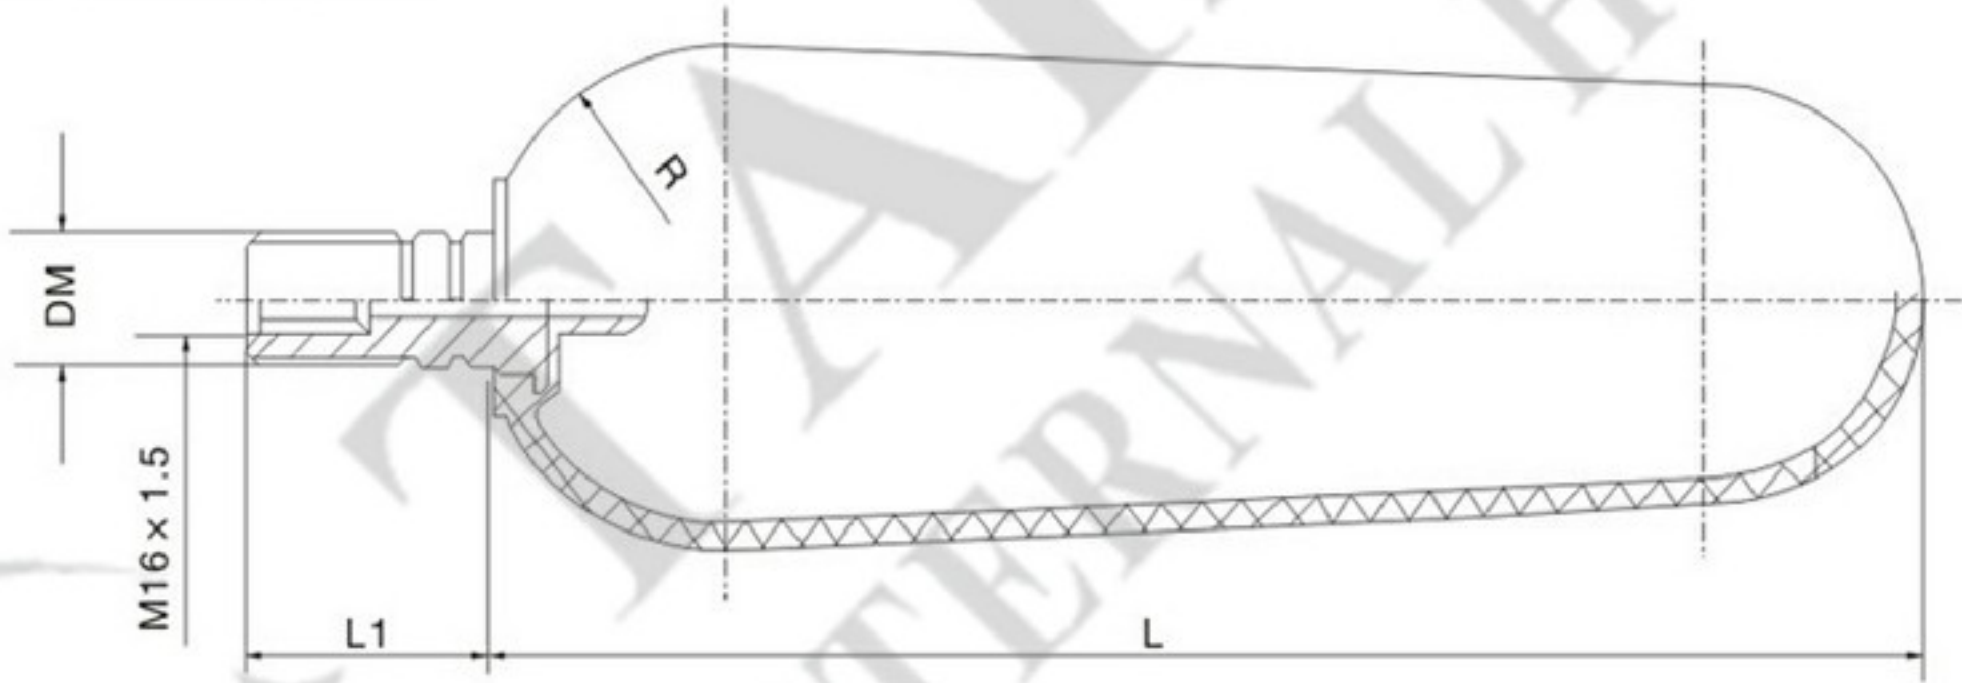

1).NXQ系列蓄能器胶囊(Φ89–Φ219)/Accumulator bladder

蓄能器 容积(L) Accumulator volume	基本尺寸 Size(mm)				蓄能器 容积(L) Accumulator volume	基本尺寸 Size(mm)			
	DM	L	L1	R		DM	L	L1	R
0.4	M24 × 1.5	74	44	38.5	6.3	M30 × 1.5	486	49	66
0.63		144			10		365		
1		250			16		569		
1.6	M30 × 1.5	144	49	66	25		877	60	95
2.5		206			40		1405		
4		312							

2).NXQ系列蓄能器胶囊(Φ 299)/Accumulator bladder

蓄能器 容积(L) Accumulator volume	基本尺寸 Size(mm)			
	DM	L	L1	R
20	M30 × 1.5	380	60	131
25		470		
40		740		
63		1180		
80		1440		
100		1880		

■ 订货说明 Ordering Note

- 1.订货时须写明型号代号全称，如：工作压力为31.5MPa、容积为40L、长度为1405mm的(NXQ系列)蓄能器胶囊：40LX1405–A
- 2.若其他规格的胶囊尺寸及对胶囊有特殊要求时，请同本公司商洽。
- 1.The model and the code should be indicated when ordering. for example, working pressure:31.5Mpa, the nominal volume: 40L,length: 1405mm,(NXQ series), this kind of the bladder should be expressed as following: 40L × 1405–A.
- 2.If other size or special requirement is need on the bladder, please contact our company.

■ 型号说明 Model Designations




- ① 隔膜式蓄能器/Diaphragm accumulator
- ② 结构型式:A、B、C、D型/Structure:A、B、C、D
- ③ 公称容积/Nominal Capacity:L
- ④ 公称压力/Nominal Pressure:bar
- ⑤ 连接型式/Connection type:螺纹连接/L-thread connection
- ⑥ 工作介质/Medium Y:液压油/hydraulic oil R:乳化液/emulsion




■ 型号与尺寸 Model and Size


A型(Type A)

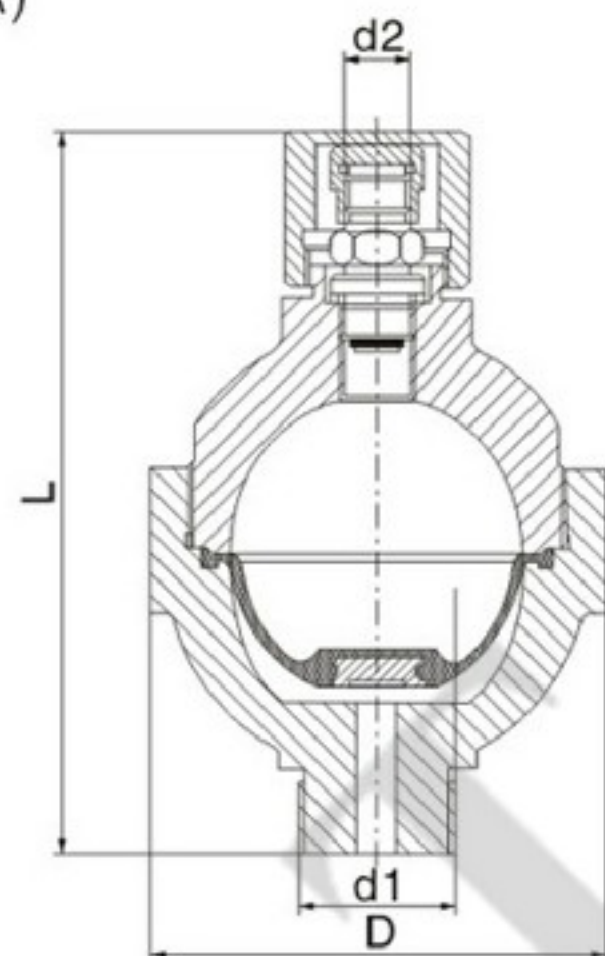


B型(Type B)

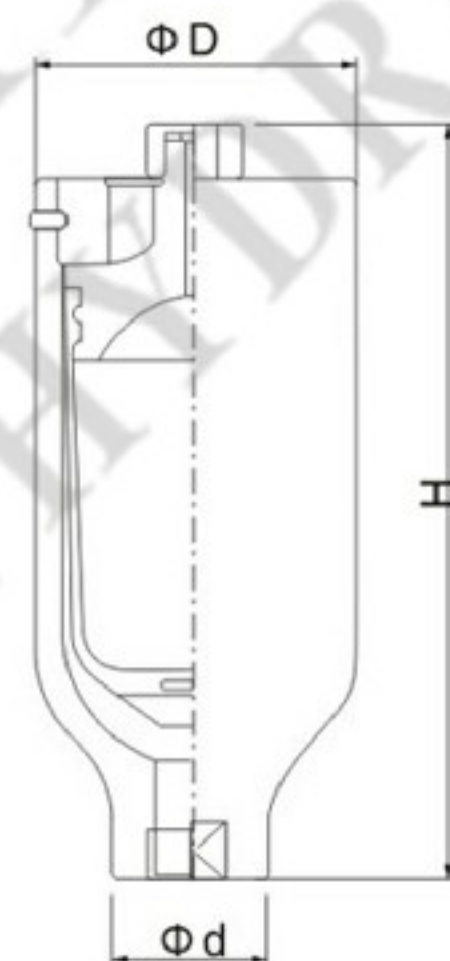

C型(Type C)

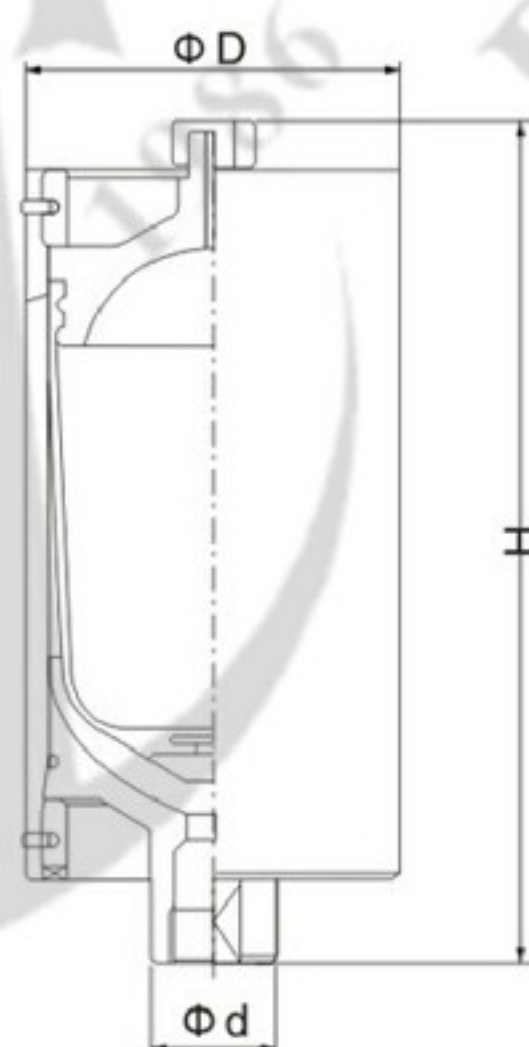

D型(Type D)

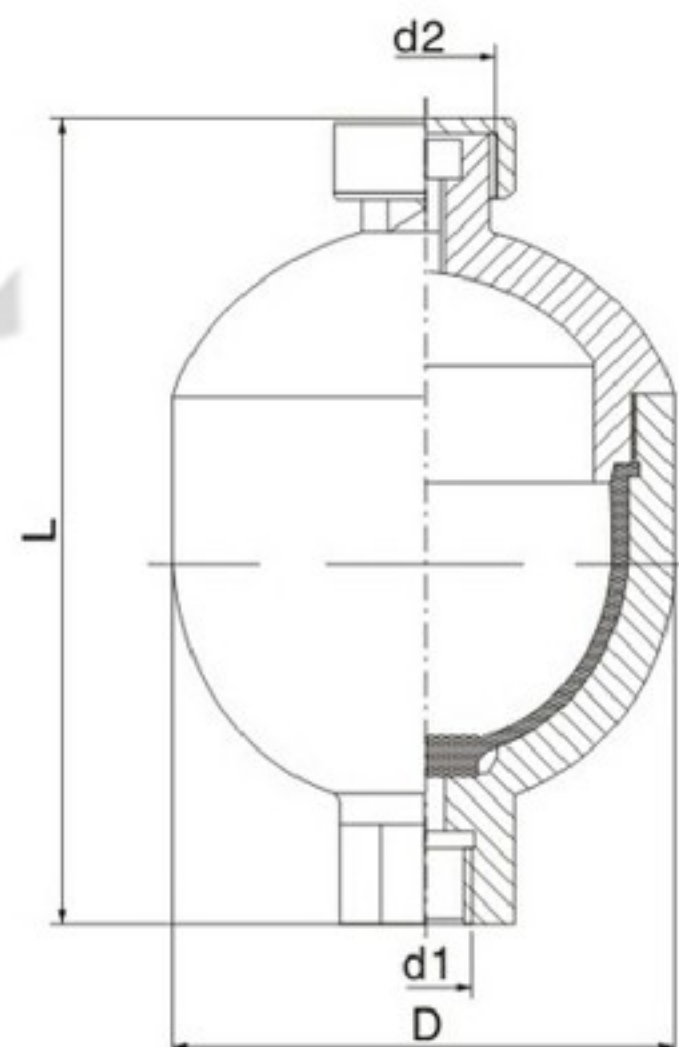

A型隔膜式蓄能器尺寸/A type Diaphragm Accumulator Dimension

公称容积 Nominal Volume (L)	公称压力 Nominal Pressure (bar)	尺寸 Dimension(mm)					
		d1			d2	D	L
		Metric Standard	ISO228	Customizes			
0.1	210-500	M33x2	G1/2	Contact us	M14x1.5	φ96	152
0.5	210-330	M18x1.5				φ116	185
1	210-330	M22x1.5				φ136	228

B型隔膜式蓄能器尺寸/B type Diaphragm Accumulator Dimension

公称容积 Nominal Volume (L)	公称压力 Nominal Pressure (bar)	尺寸Dimension(mm)						
		d1			d2	d	D	H
		Metric Standard	ISO228	Customizes				
1	210-330	M22x1.5	G1/2	Contact us	M14x1.5	40	φ114	250
2	210-330	M27x2	G3/4				φ152	275
3	210-330	M24x2					φ152	350

C型隔膜式蓄能器尺寸/C type Diaphragm Accumulator Dimension

公称容积 Nominal Volume (L)	公称压力 Nominal Pressure (bar)	尺寸Dimension(mm)						
		d1			d2	d	D	H
		Metric Standard	ISO228	Customizes				
1	210-330	M22x1.5	G1/2	Contact us	M14x1.5	40	φ114	270
2	210-330	M27x2	G3/4				φ152	295
3	210-330	M24x2					φ152	370

D型隔膜式蓄能器尺寸/D type Diaphragm Accumulator Dimension

公称容积 Nominal Volume (L)	公称压力 Nominal Pressure (bar)	尺寸 Dimension(mm)					
		d1			d2	D	L
		Metric Standard	ISO228	Customizes			
0.07	210-330	M14x1.5	G1/2	Contact us	M28x1.5	φ65	120
0.25	210-330	M16x1.5				φ95	145
0.35	210-330	M18x1.5				φ100	167
0.75	210-330	M22x1.5				φ126	190

AW/AH系列板-鳍式铝合金高压风冷却器

AW/AH Series Plate-Fin Hydraulic Aluminum Oil Cooler



型号 Model	牙口 RC/PT"	流量(L/min) Rate of flow	风扇功率 (W) Fan power	冷却能力(KW) Cooling capacity	散热面积 (M ²) Cooling area	包装尺寸 (cm) Packing size	重量(Kg) Weight	风扇电压 Fan voltage
AW0607T-CA	1/2"	20	34	1.1	0.8	28*21.5*13	4	AC110V/220V-240V/380V DC12V/24V 50Hz
AH0607T-CA	3/4"	40	34	1.05	1	28*21.5*13	5	
AH0608T-CA	3/4"	60	34	1.8	1.3	35*22.5*14	6	
AH0608TL-CA	3/4"	60	2*34	2.4	1.8	44*22*15.5	7	
AH0609T-CA	3/4"	90	34	5	3.1	50*43*22	11	
AH1012T-CA	1"	100	45/52	5.8	3.2	44.5*37*22	12	
AH/AJ1012T-DC	1"	100	45/52	5.8	3.2	44.5*37*18	12	DC12V/24V
AH1417T-CA	1"	150	142/135	8	6.2	58*45*38	25	AC110V/220V240V/380V 50Hz
AH/AJ1417T-DC	1"	150	216	8	6.2	58*45*30	25	DC12V/24V
AH1470T-CA	1 1/4"	200	142/135	8.8	8.3	58*45*38	26	AC110V/220V240V/380V 50Hz
AH/AJ1470T-DC	1 1/4"	200	216	8.8	8.3	58*45*30	26	DC12V/24V
AH1490T-CA	1 1/2"	250	142/135	11.5	10.5	58*45*38	29	AC220V-240V/380V 50Hz
AH/AJ1490T-DC	1 1/2"	250	216	11.5	10.5	58*45*38	29	DC12V/24V
AH1680T-CA	1 1/2"	300	423/448	19	14	85*66*42	55	AC220V-240V/380V 50Hz
AH2413T-CA	1 1/2"	450	836	34	33.2	95*75*43	73	AC380V/50Hz
AH3818T-CA	1 1/2"	600	1494	58	48.2	105*97*55	103	
AH3-2583T-CA	1 1/2"	400	120KW	3*0.75/1.5/ 2.2KW	77.2	240*85*66	300	AC220V380V 50Hz
AH1890	1 1/2"	250	2*150	26	15.8	85*68*35	55	

AW系列---可用于高压可变量活塞泵的泄油口，或独立循环冷却回路。


AW Series---it suitable for port of high pressure variable displacement piston pumps, or independent loop

AH 系列---可以用在油压系统的回油回路，但是必须加装旁通泄压回路。最大静态压力：20kgf/m²

AH Series---it suitable for return loop of hydraulic system, but must have bypass pressure relief loop.

Max. static state pressure: 20kgf/m²


OR系列水冷却器结构图 OR Series Water Cooler

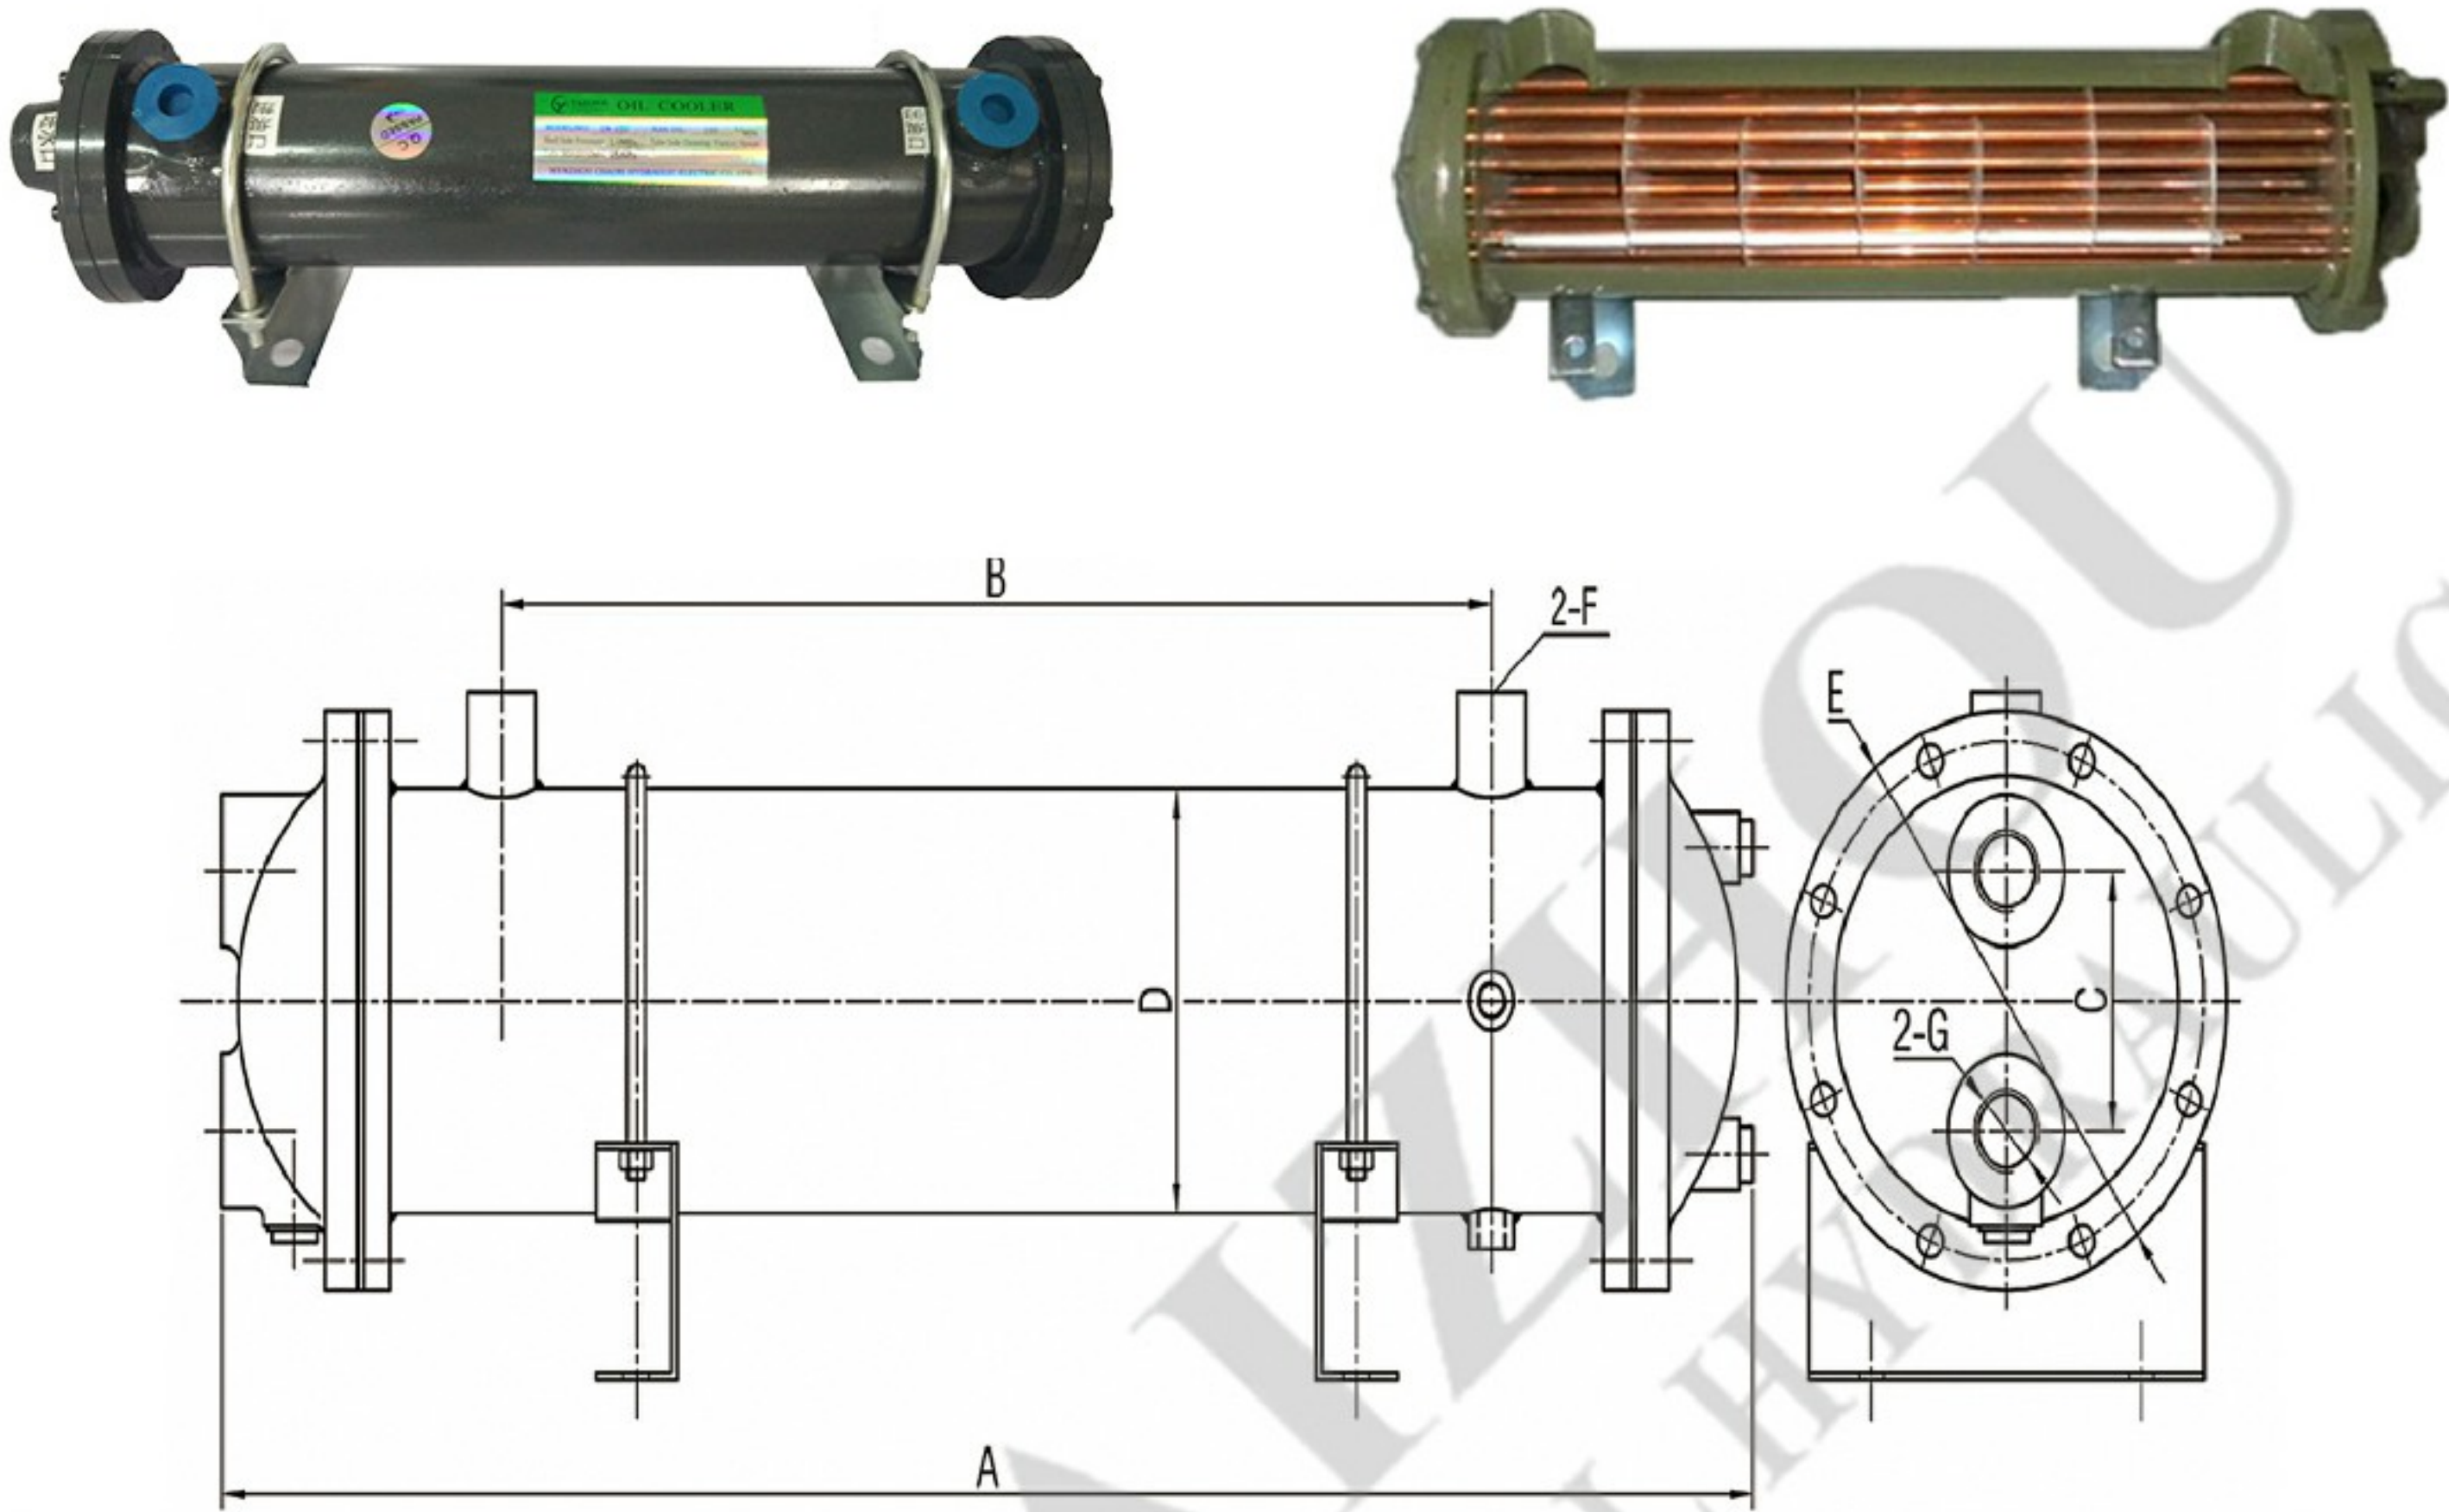


OR系列产品规格和外形尺寸 OR Water Cooler Specifications And Dimensions

Model	A	B	C	D	E	F	G	Cooling Area m ²	Tank Capacity	Weight	Pump Flow	Water Flow
OR-60	450	305	40	89.1	120	3/4	3/4	0.24	60	8	100	50
OR-100	555	370	55	114.3	140	3/4	3/4	0.35	100	12	200	100
OR-150	575	385	65	139.8	170	1 1/4	1	0.6	150	17	300	150
OR-250	780	585	65	139.8	170	1 1/4	1	1.2	250	22	300	150
OR-350	1180	990	65	139.8	170	1 1/4	1	1.9	350	30	300	150
OR-600	1175	950	85	165.2	196	2	1 1/4	1.9	600	35	400	200
OR-800	1700	1490	85	165.2	196	2	1 1/4	2.8	800	43	400	200
OR-1000	2140	1890	85	165.2	196	2	1 1/4	3.5	1000	51	400	200
OR-1200	2530	2270	85	165.2	196	2	1 1/4	4.2	1200	58	400	200

Special Products:Customized

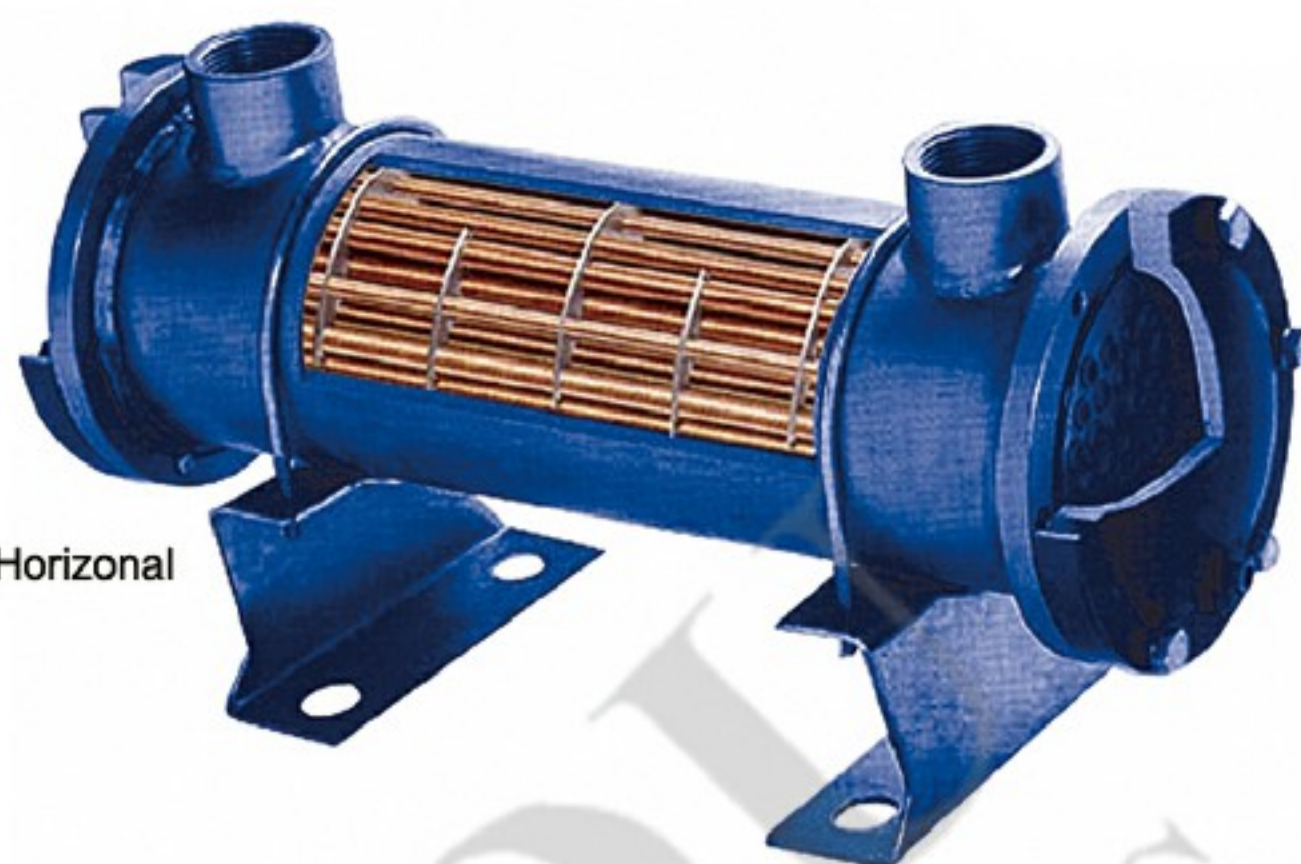

Model	Spec	Cooling Area m²	Working Pressure Mpa	Working Temperature C°	Pressure Drop		Oil-Water Flow Ratio	Viscosity	Heat Trasfer Coefficient W/m² · k		
					Oil	Water					
GLC1		0.4-1.2	0.63 1.0	≤120	≤0.1	≤0.05	1:1	200-300	≤350		
GLC2		1.3-3.5									
GLC3		4-11									
GLC4		13-27									
GLC5		30-54									
GLC6		55-90	0.63 1.0							1:1.5	
GLL6		3-7									
GLL7		8-11									
GLL8		12-28									
GLL9		35-60									
GLL10		80-120									
GLL11		140-180									
GLL12		200-300									

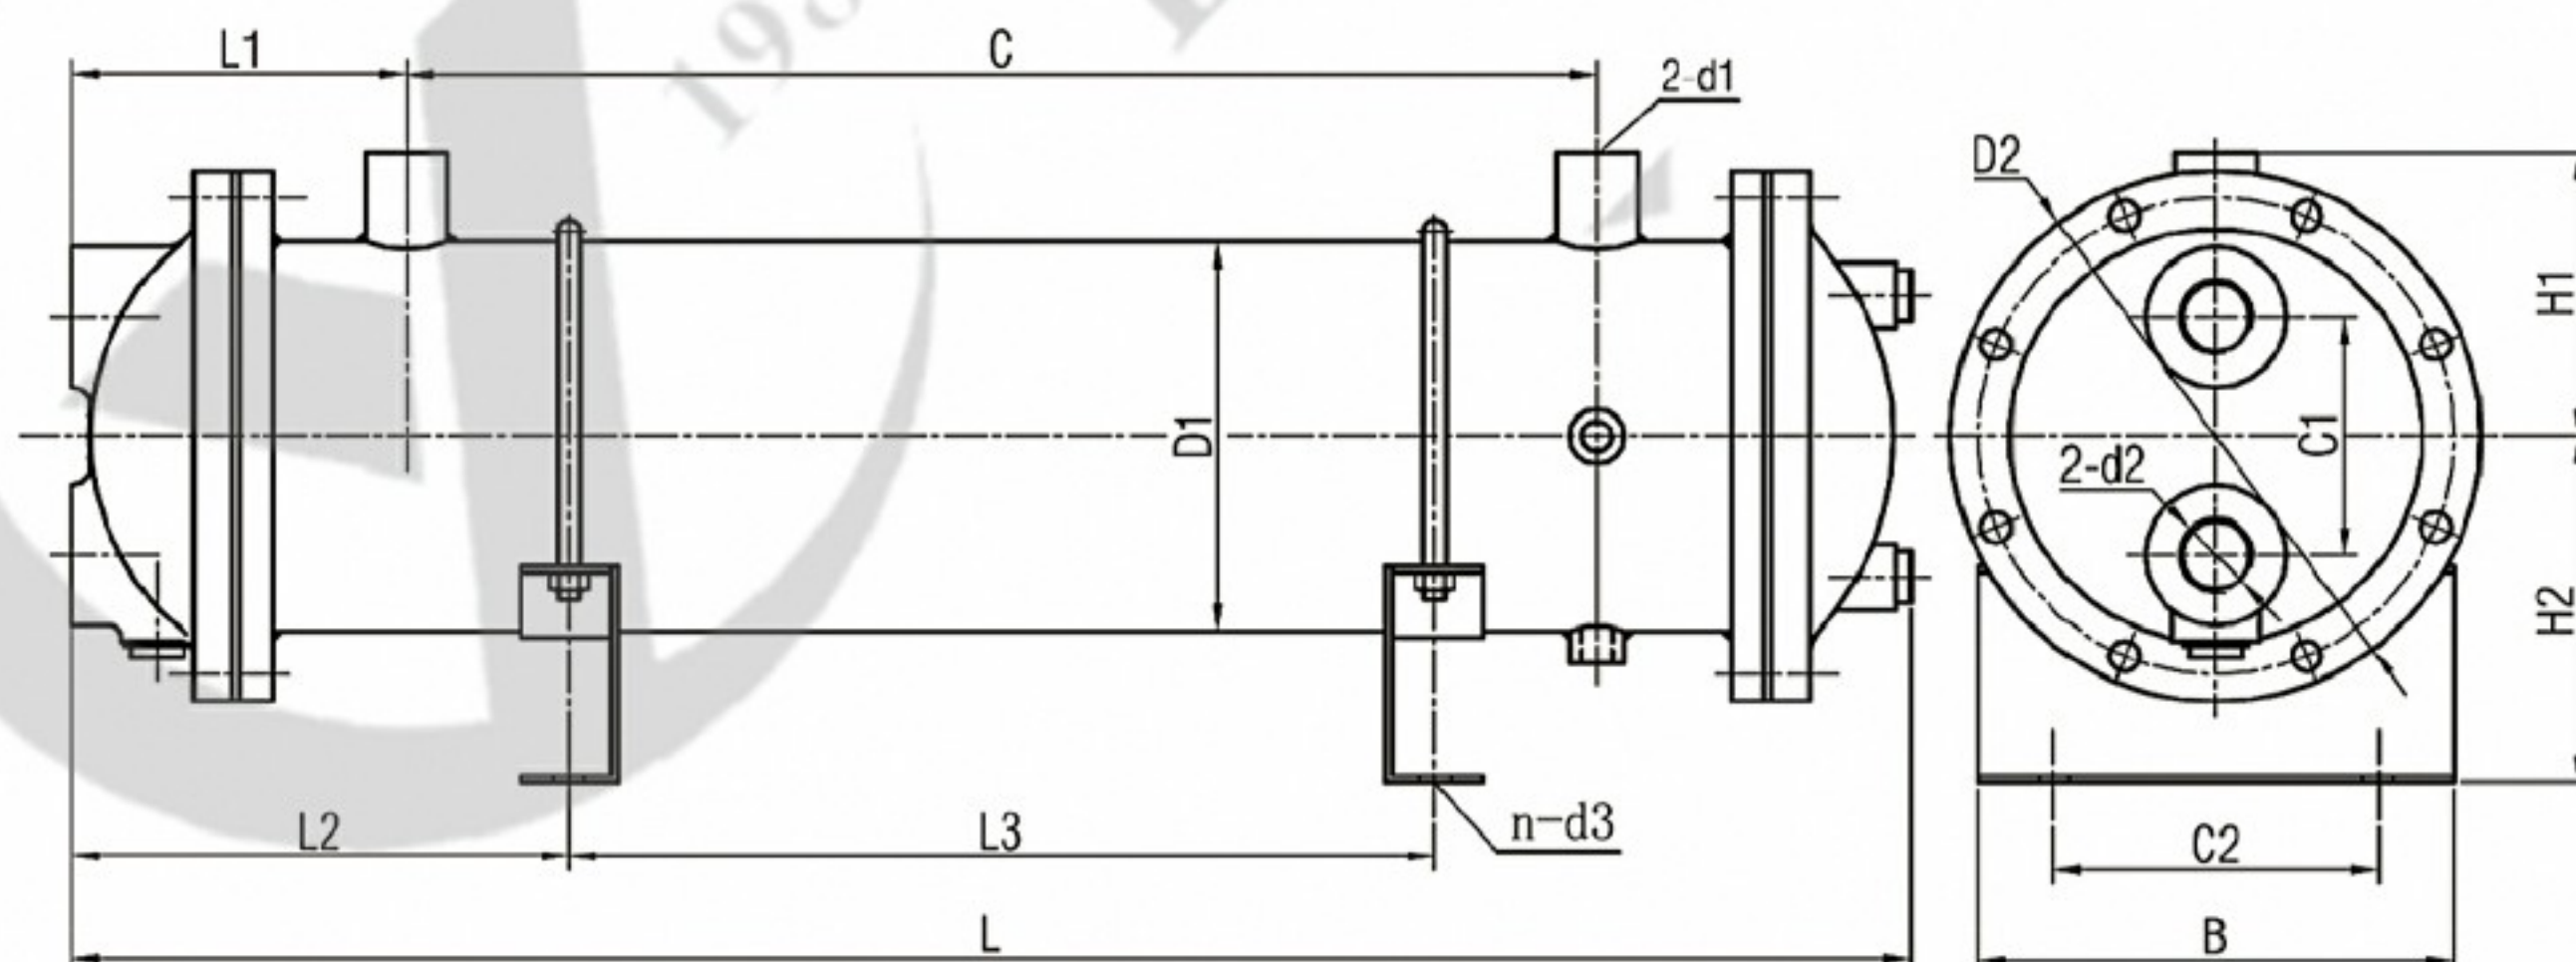

■ GLC系列产品规格和外形尺寸 GLC Water Cooler Specifications And Dimensions

Model	L	C	L ₁	H ₁	H ₂	D ₁	D ₂	C ₁	C ₂	B	L ₂	L ₃	n-d ₃	d ₁	d ₂	Weight (kg)
GLC ₁ -0.4	370	240	67	60	68	78	115	52	102	132	115	145	4-(ø11)	G1" (Dg25)	G3/4" (Dg20)	8
GLC ₁ -0.6	540	405										310				10
GLC ₁ -0.8	660	532										435				12
GLC ₁ -1	810	665										570				13
GLC ₁ -1.2	940	805										715				15
GLC ₂ -1.3	560	375	98	85	93	121	165	78	145	175	172	225	4-(ø11)	G1" (Dg25)	G1" (Dg25)	19
GLC ₂ -1.7	690	500										350				21
GLC ₂ -2.1	820	635										485				25
GLC ₂ -2.6	960	775										630				29
GLC ₂ -3	1110	925										780				32
GLC ₂ -3.5	1270	1085										935				36
GLC ₃ -4	840	570	152	125	158	168	215	110	170	210	245	380	4-(ø15)	G1 1/2" (Dg36)	G1 1/4" (Dg30)	74
GLC ₃ -5	990	720										530				77
GLC ₃ -6	1140	870										680				85
GLC ₃ -7	1310	1040										850				90
GLC ₃ -8	1470	1200										1010		G2" (Dg50)	G1 1/2" (Dg36)	96
GLC ₃ -9	1630	1360										1170				105
GLC ₃ -10	1800	1530										1340				110
GLC ₃ -11	1980	1710										1520				118
GLC ₄ -13	1340	985	197	160	208	219	285	140	270	320	318	745	4-(ø19)	G2" (Dg50)	G2" (Dg50)	152
GLC ₄ -15	1500	1145										905				164
GLC ₄ -17	1660	1305										1065				175
GLC ₄ -19	1830	1475										1235				188
GLC ₄ -21	2010	1655										1415				200
GLC ₄ -23	2180	1825										1585				213
GLC ₄ -25	2360	2005										1765				225
GLC ₄ -27	2530	2175										1935				238
GLC ₅ -30	1932	1570	202	200	234	273	335	180	280	320	327	1320	4-(ø23)	G2 1/2" (Dg60)	G2" (Dg50)	
GLC ₅ -34	2152	1790										1540				
GLC ₅ -37	2322	1960										1710				
GLC ₅ -41	2542	2180										1930				
GLC ₅ -44	2712	2350										2100				
GLC ₅ -48	2872	2510										2260				
GLC ₅ -51	3092	2730										2480				
GLC ₅ -54	3262	2900										2650				
GLC ₆ -55	2272	1860	227	230	284	325	410	200	300	390	362	1590	4-(ø23)	G3" (Dg70)	G2 1/2" (Dg60)	
GLC ₆ -60	2452	2040										1170				
GLC ₆ -65	2632	2220										1950				
GLC ₆ -70	2812	2400										2130				
GLC ₆ -75	2992	2580										2310				
GLC ₆ -80	3172	2760										2490				
GLC ₆ -85	3352	2940										2670				
GLC ₆ -90	3532	3120										2850				

Special Products:Customizes


GLP型号说明 GLP Model Code


GLP -XX

Cooling Area (m²)

Mounting Type: L: Vertical; No Mark: Horizontal

Cooler Series: GLP Series

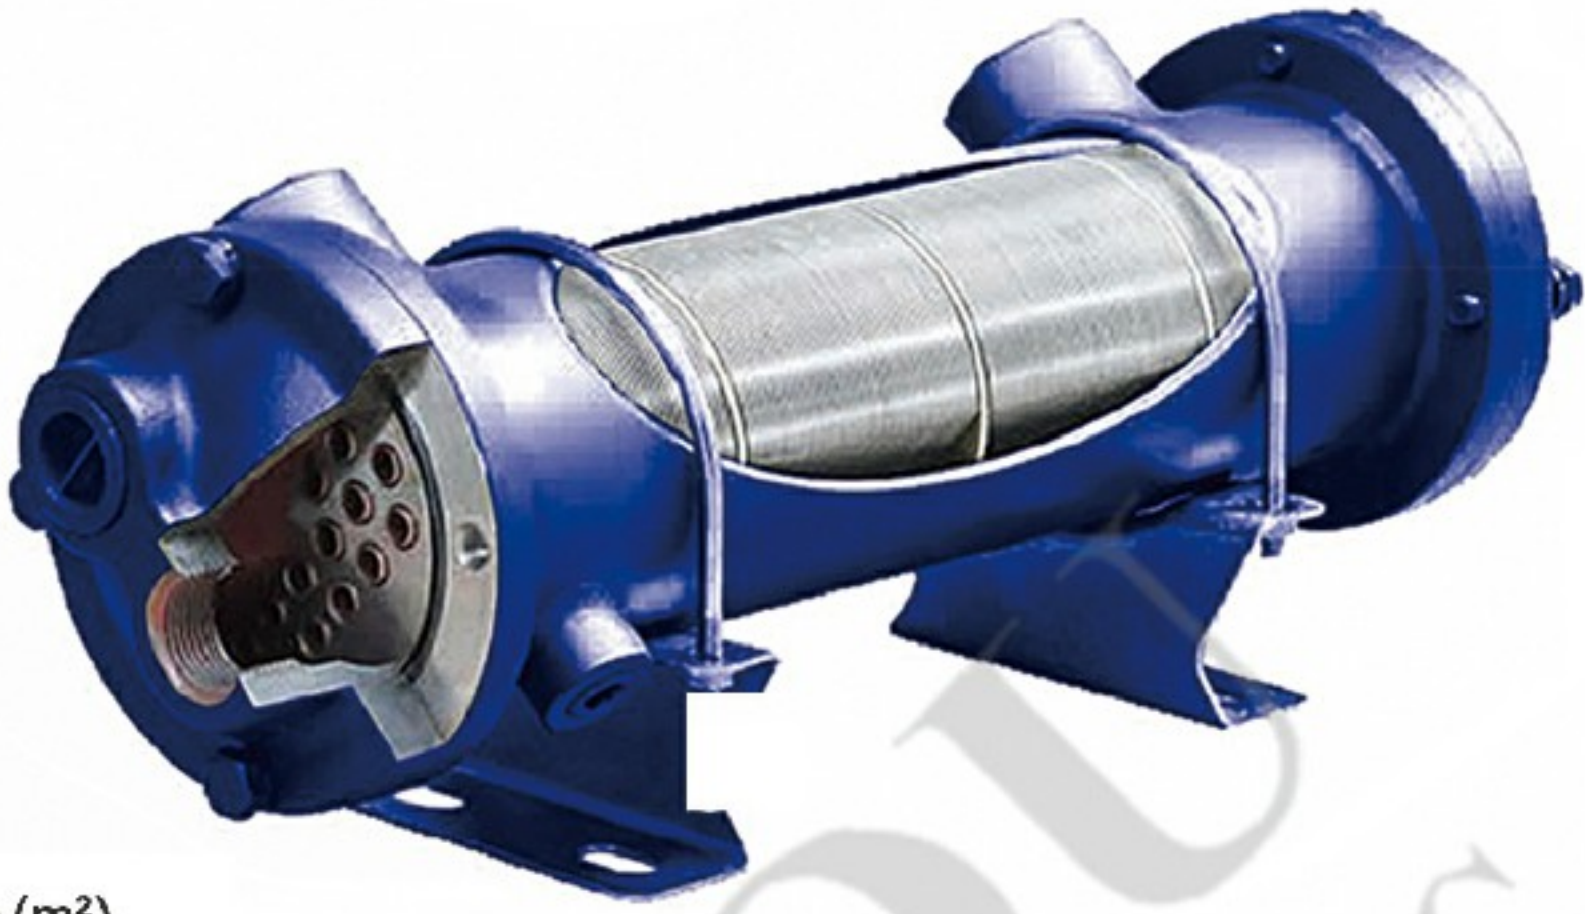

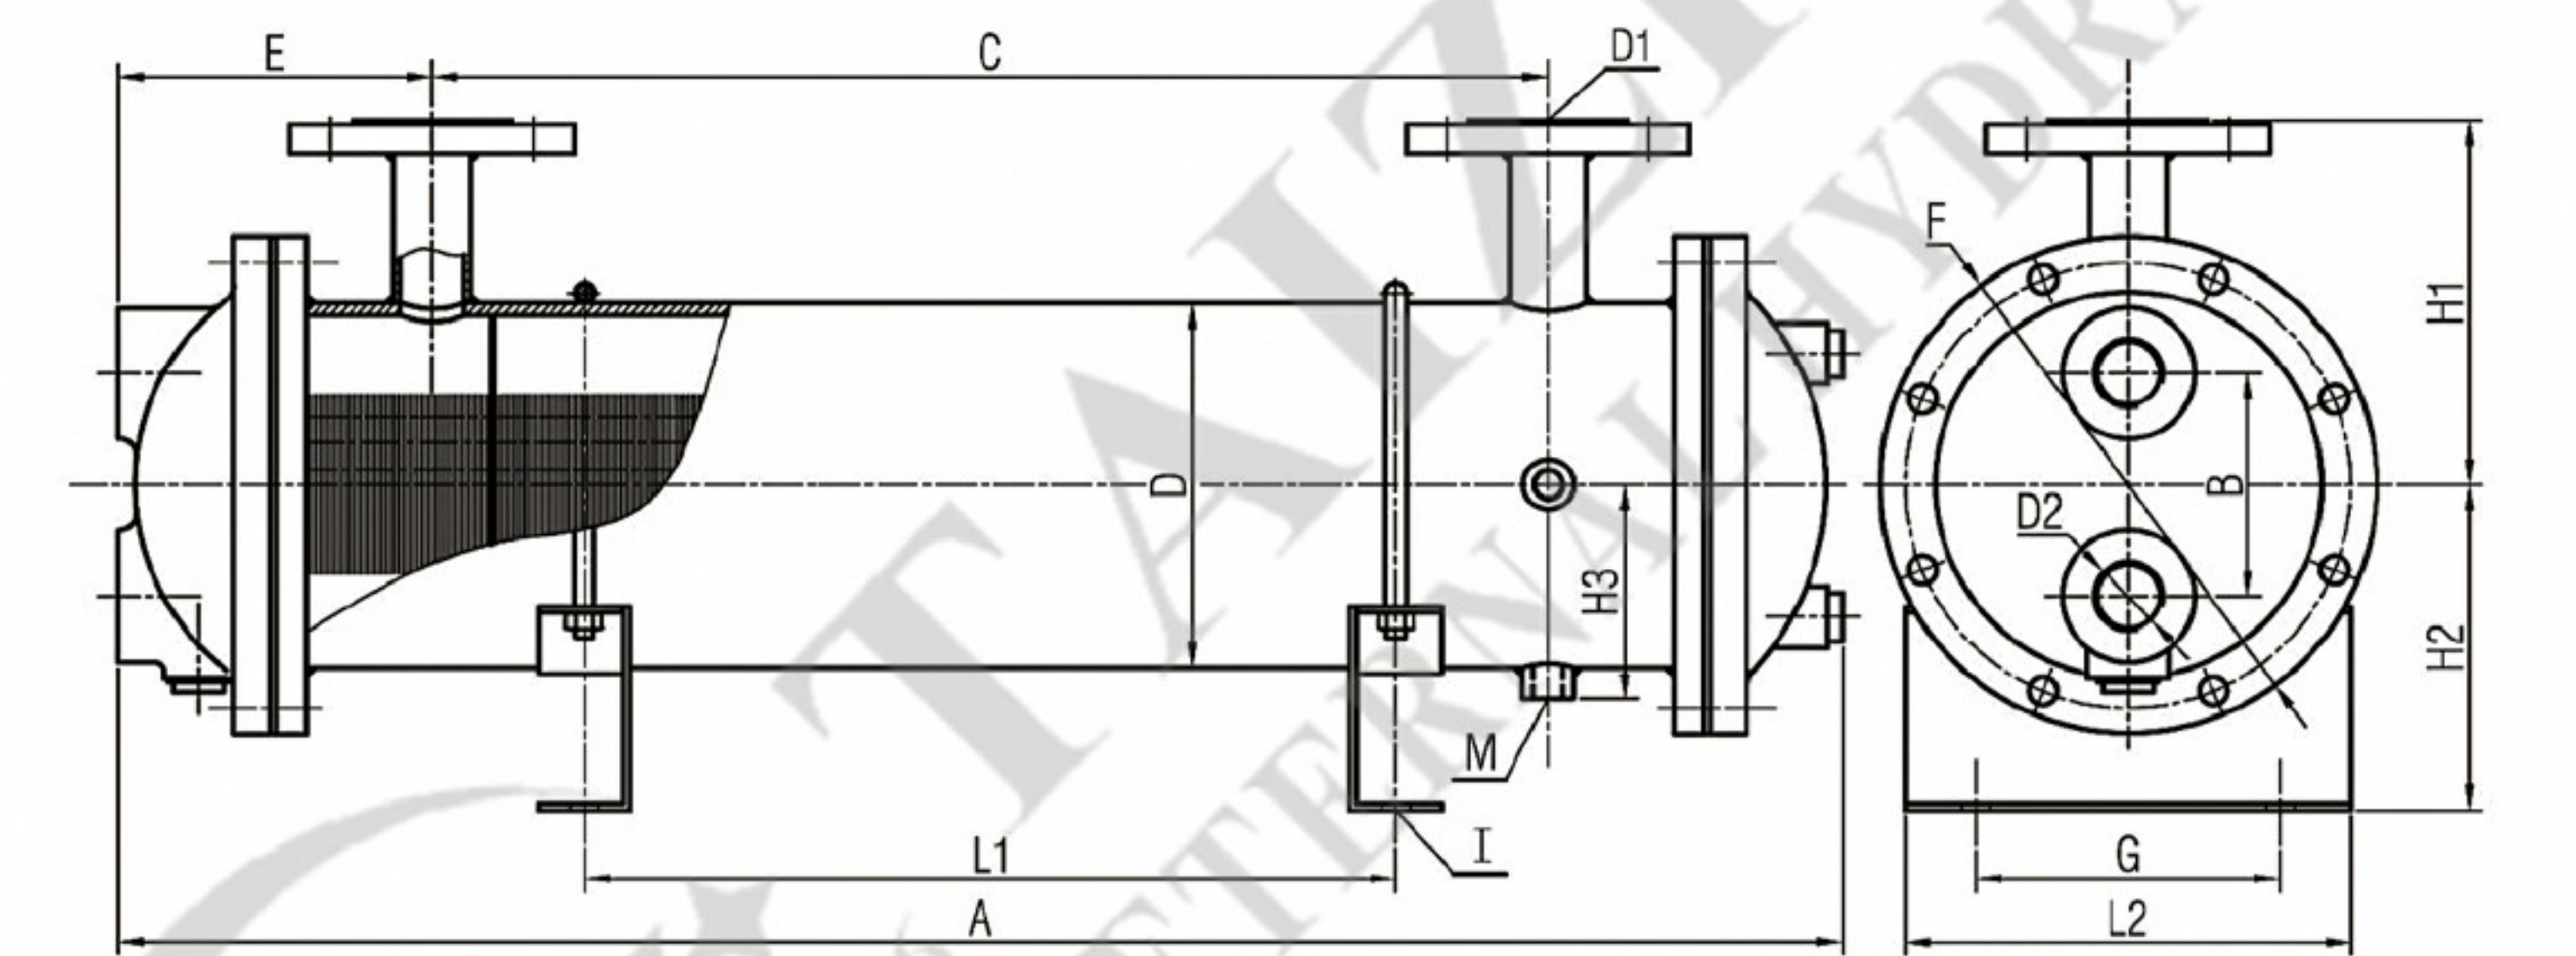

GLP系列水冷却器结构图 GLP Water Cooler Specifications And Dimensions

Model	A	B	C	D	E	F	G	D1	D2	L1	L2	H1	H2	H3	M	I
GLP-0.4	370	38	240	76	75	105	70	G1"	G1/2"	145	100	60	68	50	5-G1/4"	4-Φ12
GLP-0.6	540		405							310						
GLP-0.8	660		532							435						
GLP-1.0	810		665							570						
GLP-1.2	940	60	805	121	96	165	130	G1"	G1"	715	160	90	95	75	5-G1/4"	4-Φ12
GLP-1.3	560		375							225						
GLP-1.7	685		500							350						
GLP-2.1	820		635							485						
GLP-2.6	960	110	775	168	145	215	105	DN25	G1"	630	205	154	155	100	5-G1/4"	4-Φ14
GLP-3.0	1090		905							760						
GLP-3A	930	110	645	168	145	215	105	DN25	G1"	545	205	154	155	100	5-G1/4"	4-Φ14

GLP系列产品规格和外形尺寸 GLP Water Cooler Specifications And Dimensions

Model	A	B	C	D	E	F	G	D1	D2	L1	L2	H1	H2	H3	M	I
GLP-4	840	110	550	180	155	245	150	DN32	G1-1/2"	400	220	180	160	105	5-G1/4"	4-Φ14
GLP-5	1020		730					580								
GLP-6	1150		860					710								
GLP-7	1340		1050					900								
GLP-8	1490		1200					1050								
GLP-9	1640		1350					1200								
GLP-10	1850		1560					1350								
GLP-11	1170	182	800	299	205	372	260	DN65	G2"	650	360	240	220	170	5-G1/2"	4-Φ18
GLP-12	1240		870							720						
GLP-13	1315		945							795						
GLP-15	1370		1000							850						
GLP-16	1470		1060							910						
GLP-17	1535		1125							925						
GLP-18	1600		1190							1040						
GLP-19	1685		1275							1125						
GLP-20	1750		1340							1190						
GLP-21	1830		1420							1270						
GLP-22	1905		1495							1345						
GLP-23	1990		1580							1430						
GLP-24	2055		1645							1495						
GLP-25	2120		1710							1560						
GLP-27	2285		1845							1695						
GLP-28	2350		1910							1760						
GLP-30	2500		2060						DN80	G2-1/2"						
GLP-34	1740	230	1260	351	240	445	320	DN80	G2-1/2"	1110	420	280	245	195	5-G1/2"	4-Φ18
GLP-35	1780		1300							1150						
GLP-37	1855		1375							1225						
GLP-40	1970		1490							1340						
GLP-41	2010		1530							1380						
GLP-44	2125		1645							1495						
GLP-45	2165		1685							1535						
GLP-48	2280		1800							1650						
GLP-50	2360		1880							1730						
GLP-51	2390		1910							1760						
GLP-54	2500		2020							1870						
GLP-55	2540		2060							1910						
GLP-60	2730		2250							2100						
GLP-70	3000	235	2300	426	405	535	445	DN100	DN100	2000	505	330	330	233	7-G3/4"	4-Φ22
GLP-80	3350		2650							2350						
GLP-90	2760	258	2000	508	440	610	565	DN100	DN100	1700	610	358	375	278	7-G3/4"	4-Φ22
GLP-100	3045		2280					1980								
GLP-110	3215		2450					2150								
GLP-120	3425		2660					2360								
GLP-130	3679		2915					2615								
GLP-140	3935		3170					2870								
GLP-150	3095	285	2305	620	470	760	690	DN125	DN125	2005	760	480	480	335	7-G1"	4-Φ26
GLP-160	3270		2480							2180						
GLP-170	3450		2655							2355						
GLP-180	3620		2830							2530						
GLP-190	3800		3005							2705						
GLP-200	3970		3180							2880						

Special Products: Customized

液压马达Hydraulic Motor

M	H	2P	4	-AC380	-50	A	IVP1						
系列号 Series Number	马达型式 Motor Type	马力数(kw) Horse Power	极数 Pole No	电压Volte	频率Hz	轴伸形式 Shaft Connection	结合泵型号 Combine Pump Model						
M	H:卧式 Horizontal V:立式Verticle S:浸油式Oiled	1HP 2HP 3HP 5HP 7.5HP 10HP	2:3000rpm 4:1450rpm 6:980rpm 8:760rpm	AC110V AC220V AC240V AC380V AC440V DC12V DC24V DC48V	50Hz	A: 内插式 Shaft Inside	结合泵型号 Combine Pump Model						
					60Hz	B: 出轴式 Shaft Outside	省略Omit						
功率代号(马力) Power Code(HP)		1/2HP	1HP	2HP	3HP	5HP	7.5HP	10HP	15HP	20HP	25HP	30HP	40HP
功率值Power (kw)		0.368	0.735	1.47	2.205	3.075	5.513	7.35	11.03	14.7	18.38	22.05	29.4




MH



MV

NM橡胶型联轴器 NM Rubber Coupling

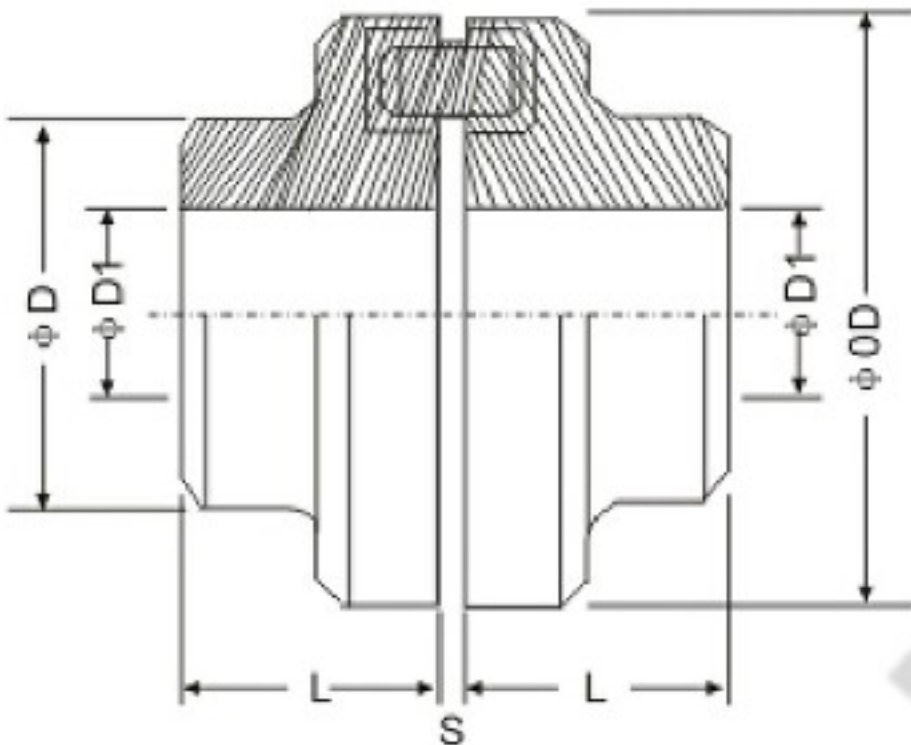

NM



NH




NL


备注：左图 c D1为轴径范围（请参照下列之规格尺寸表）
 Note: left c D1 for trunnion range (please refer to the following the specifications of size table)

型号 Model	适用马 力HP Applicable HP	扭力 The torsion		最大转 速(rpm) Maximun Rotational Speed(RPM)	轴径范围(D1)mm Trunnion Range(D1)mm		尺寸表mm The Size Table mm				重量kg Weight kg
		一般 N-M General,N-M	最大 N-M Biggest, N-M		Min	Max	D	0D	L	S	
NM-50	0.5	13	23	13500	7	19	33	50	25	20±0.5	0.48
NM-67	1.0	22	40	10000	9	28	46	67	30	2.5±0.5	1.02
NM-82	2-3	50	90	8000	10	32	53	82	40	3.0±1.0	1.88
NM-97	5-7.5	105	190	7000	12	42	69	97	50	3.0±1.0	3.54
NM-112	10-15	167	300	6000	14	48	70	112	60	3.5±1.0	5.4
NM-128	20	267	480	5000	18	55	90	128	70	3.5±1.0	8.1
NM-148	30	417	750	4500	22	65	107	148	80	3.5±1.0	13.5
NM-168	50	695	1250	4000	28	75	126	170	90	3.5±1.5	19.3
NM-194	75	1120	2000	3500	22	85	140	194	100	3.5±1.5	26.3
NM-214	100	1670	3000	3000	45	95	157	214	110	4.0±2.0	35.7
NM-240	125	2670	4800	2750	60	110	179	240	120	4.0±2.0	46.7
NM-265	150	4170	7500	2500	70	120	198	265	140	5.5±2.0	66.3

卧式内轴液压专用电机 Horizontal Inside Shaft Hydraulic Electric Motor

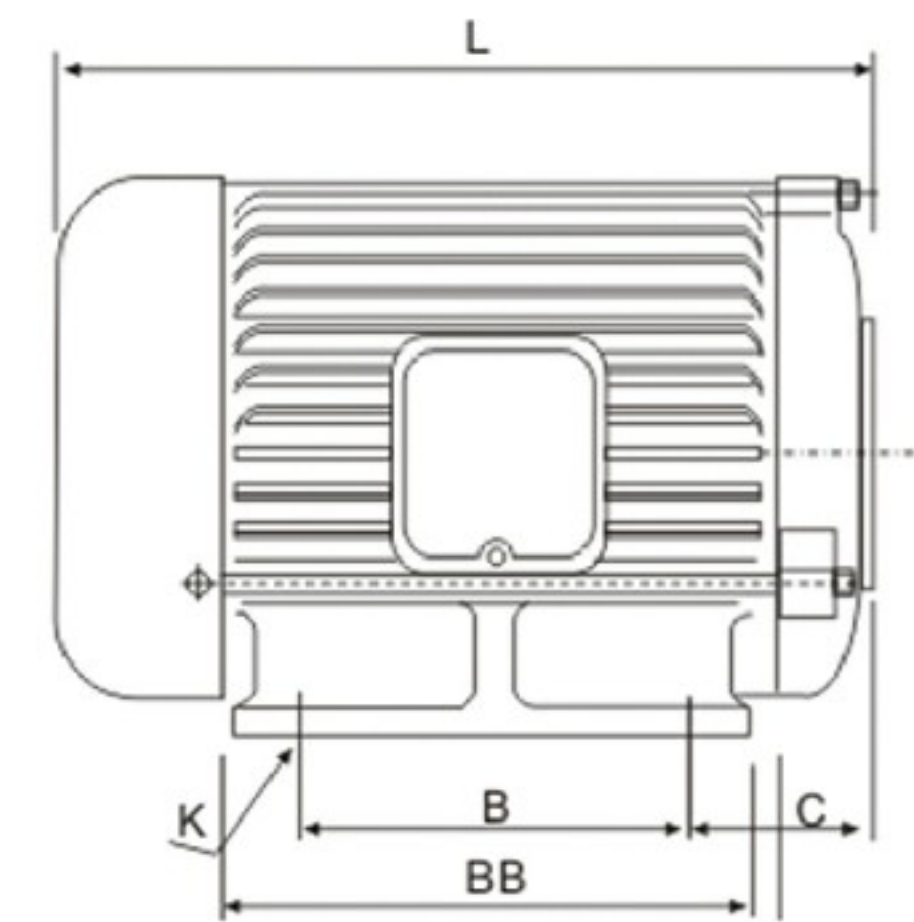

图一

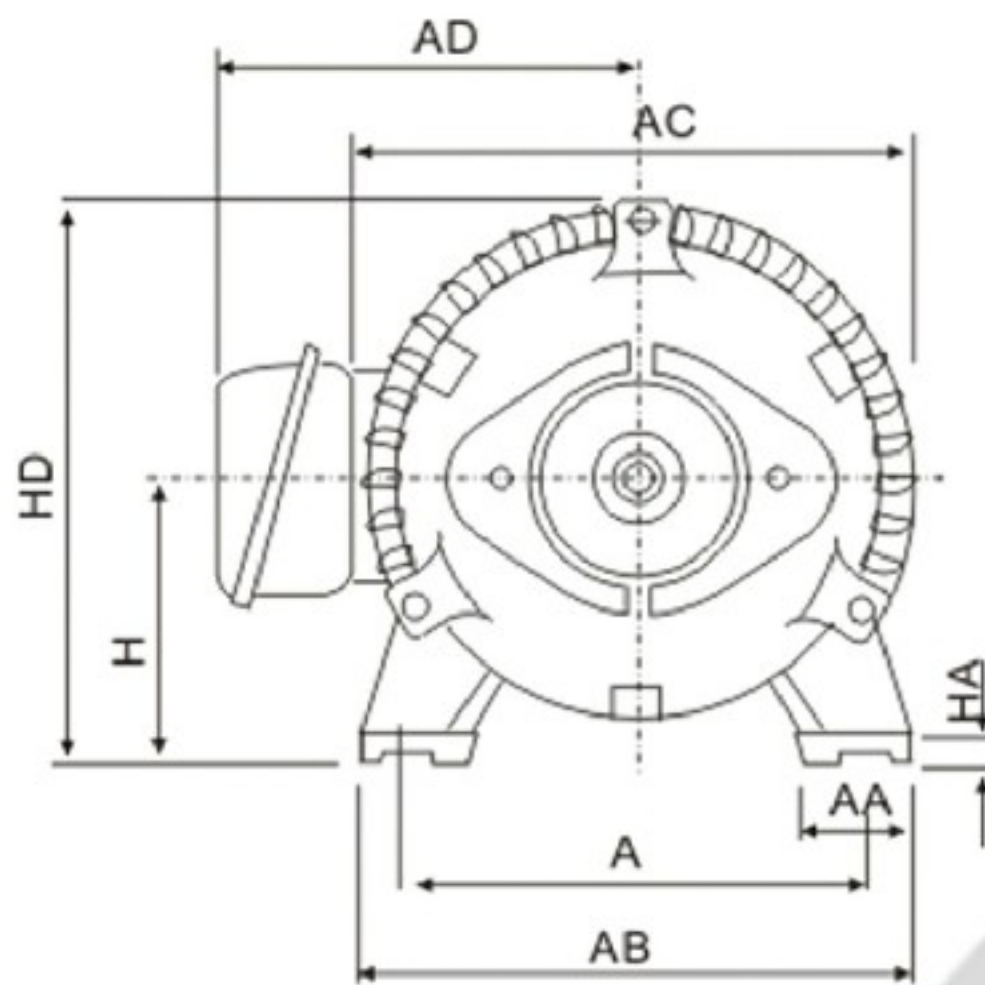


图二

单位unit :mm

4P	6P	框号 Box no.	相数 phase	图号 Drawing no.	A	AA	AB	AC	AD
1/2	1/4	80	三	图一	125	35	155	177	140
1	1/2	80	三		125	35	155	177	140
2	1	90L	三		140	35	170	196	160
3	2	100L	三	图二	160	45	200	225	160
5	3	112M	三		190	45	228	245	180
7 1/2	5	132S	三		216	45	250	270	190
10	7 1/2	132M	三		216	45	250	270	190
15	10	160M	三	图三	254	50	300	344	256
20	15	160L	三		254	50	300	344	256
25 30	20	180MC	三		279	75	355	382	301
40	25 30	180LC	三		279	75	355	382	301
1/2	-	80	单	图一	125	35	155	177	137
1	-	90L	单		140	35	176	204	155
2	-	90L	单		140	35	176	204	155
3	-	112M	单	图一	190	45	224	245	185
5	-	112M	单		190	45	224	245	185

注：1、心轴内径尺寸请参照泵浦形式样规格表。
 2、采用铣铁外壳。
 3、以上数值若有变更，恕不另行通知。

Note: 1、the mandrel diameter size refer to pump form sample specification table.
 2、using XiTie shell.
 3、if the above values have change, without prior notice.

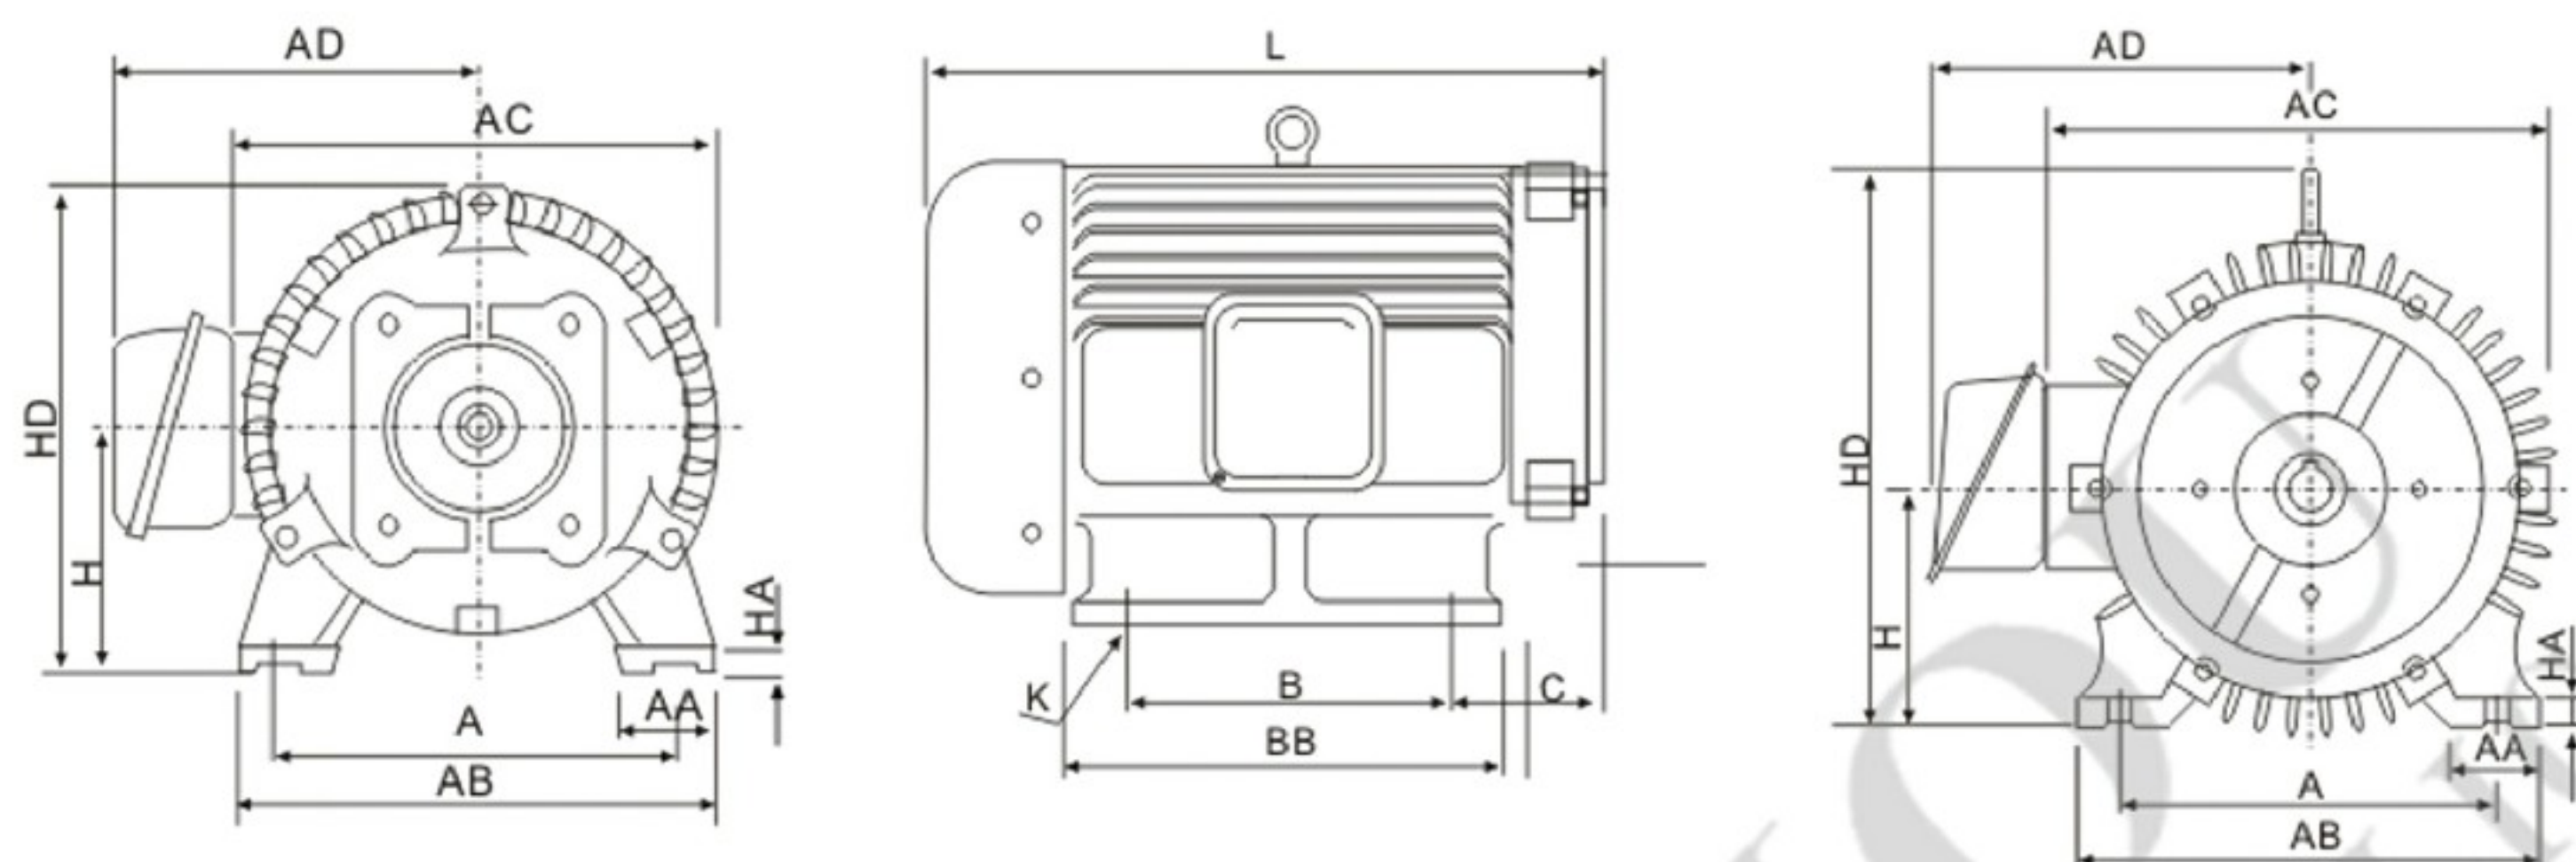


图三

单位unit :mm

B	BB	C	H	HA	HD	K	L	净重(kg) Net weight
100	130	51	80	8	170	10	230	13
100	130	53.5	80	10	170	10	240	15.5
125	150	57	90	10	190	12	278	23.5
140	175	65	100	12	247	12	307	31.5
140	175	73.5	112	12	265	12	330	38.5
140	175	77	132	16	310	12	335	60
178	212	75	132	16	310	12	370	70
210	250	87	160	16	380	15	485	115
254	300	87.5	160	18	380	15	526	140
241	297	105	180	18	421	15	541	180/220
279	335	105	180	18	421	15	579	240
100	130	58	80	10	177	10	250	15
125	150	60	90	10	190	10	295	24
125	150	64	100	12	200	10	350	28
140	175	73.5	112	14	265	12	385	42.5
140	175	95	112	14	265	12	420	48

卧式外轴液压专用电机 Horizontal Outside Shaft Hydraulic Electric Motor

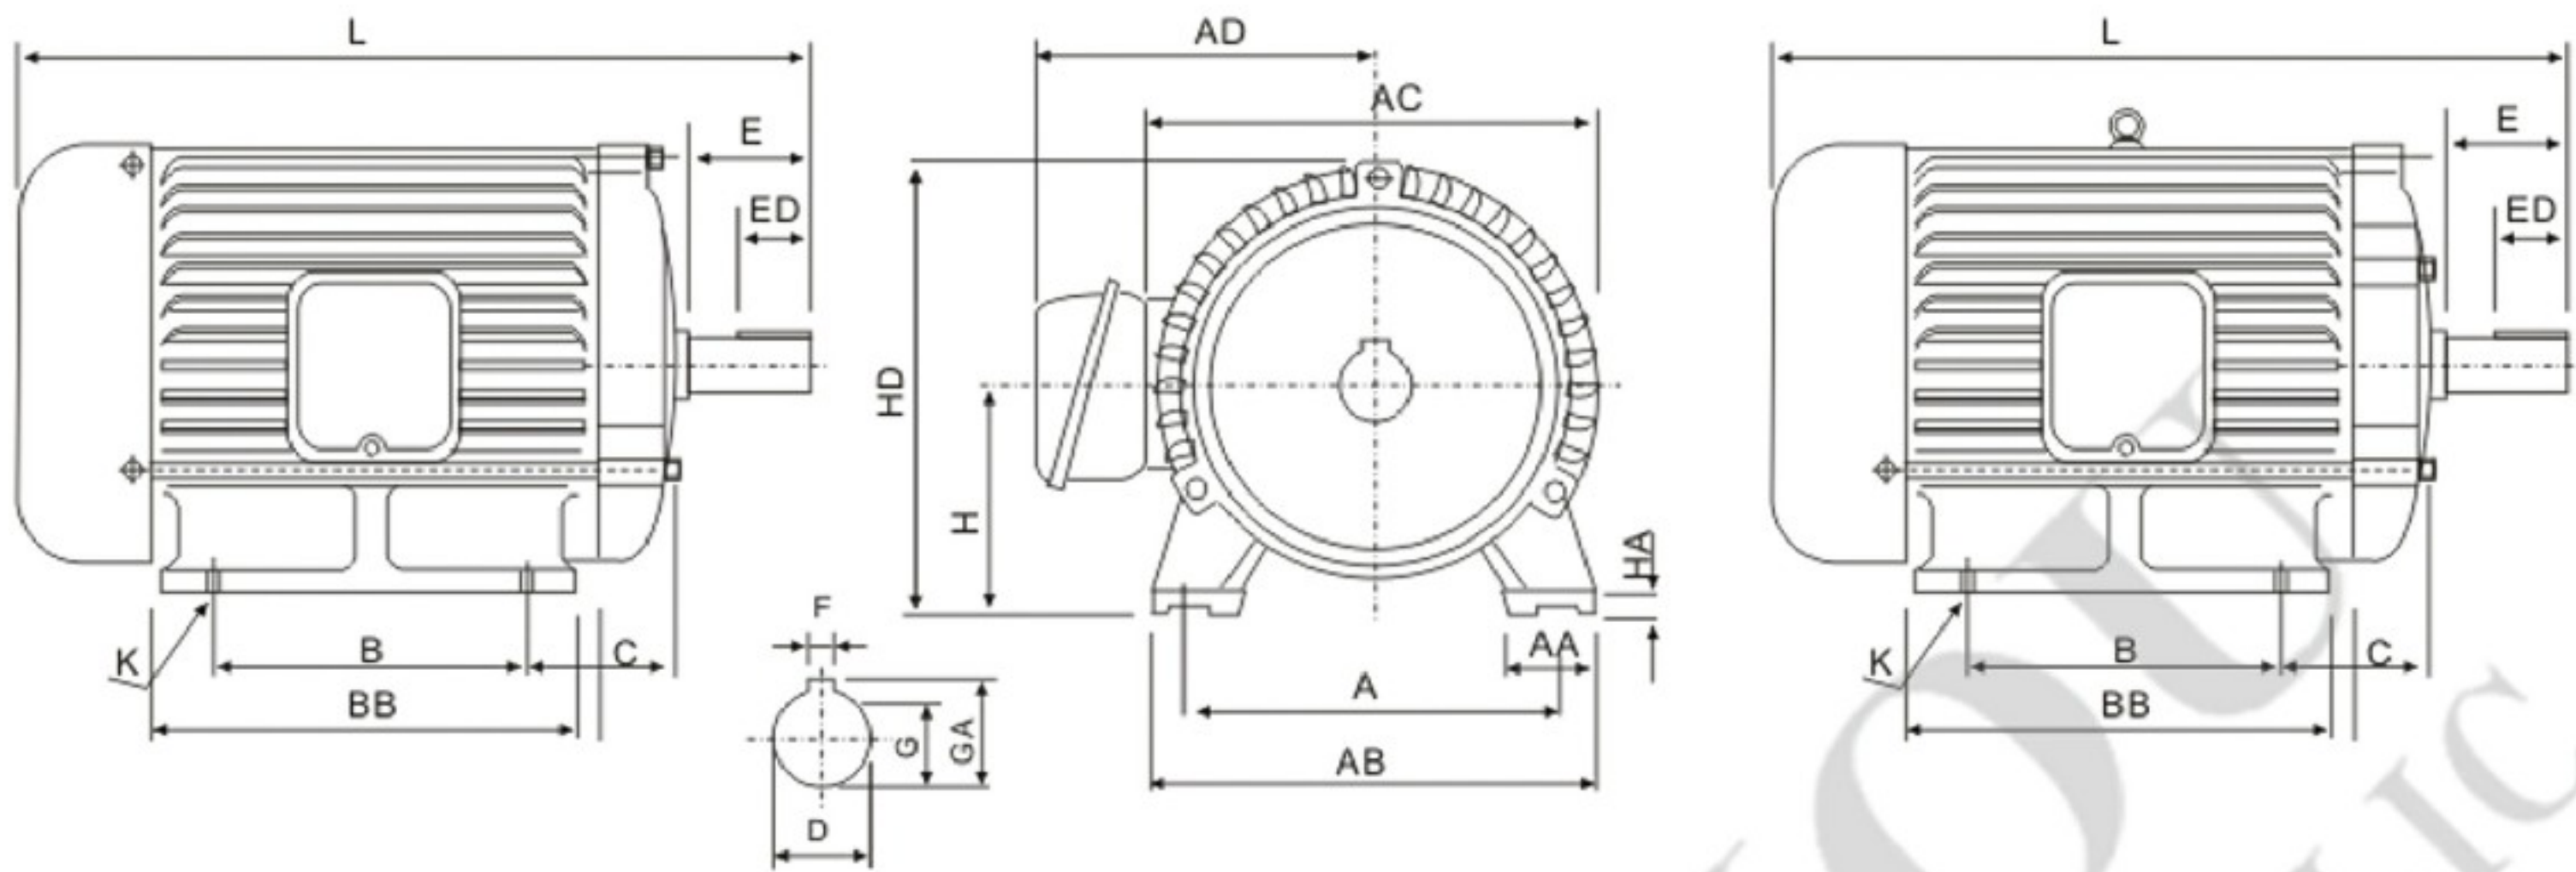

图一

图二

单位unit :mm

4P	6P	框号 Box no.	相数 phase	图号 Drawing no.	A	AA	AB	AC	AD	B	BB
1/2	1/4	71	三	图一	112	35	140	162	135	90	115
1	1/2	80	三		125	35	155	177	137	100	130
2	1	90L	三		140	35	170	200	150	125	150
3	2	100L	三	图二	160	45	195	219	173	140	175
5	3	112M	三		190	45	224	238	182	140	175
7 1/2	5	132S	三		216	45	250	275	195	140	175
10	7 1/2	132M	三		216	45	250	275	195	178	212
15	10	160M	三	图三	254	50	300	334	256	210	250
20	15	160L	三		254	50	300	334	256	254	300
25 30	20	180MC	三		279	75	355	382	301	241	297
40	25 30	180LC	三		279	75	355	382	301	279	335
1/2	-	80	单	图一	125	35	155	177	137	100	130
1	-	90L	单		140	35	170	200	150	125	150
2	-	90L	单		140	35	170	200	150	125	150
3	-	112M	单	图一	190	45	224	238	182	140	175
5	-	112M	单		190	45	224	238	182	140	175

注：1、心轴直径D公差：φ 11- φ 28:J6, φ 38- φ 48:k6, φ 55 - φ 95:m6

2、轴心高度H公差：+0,-0.5(250以下)+0,-1(280以上)。

3、单相采三相式框架，如需特别形式请另外注明。


4、以上数值若有变更，恕不另行通知。

Note: 1、the mandrel diameter D tolerances: 11-φ 28: J6, 38 - φ 48: k6, 55 - φ 95: m6

2、axis of height H tolerance: + 0, 0.5 + 0 (below 250), 1 (280).

3、single-phase, three phase type frame, if you need please also indicate the special form.

4、numerical if there are changes, without prior notice.

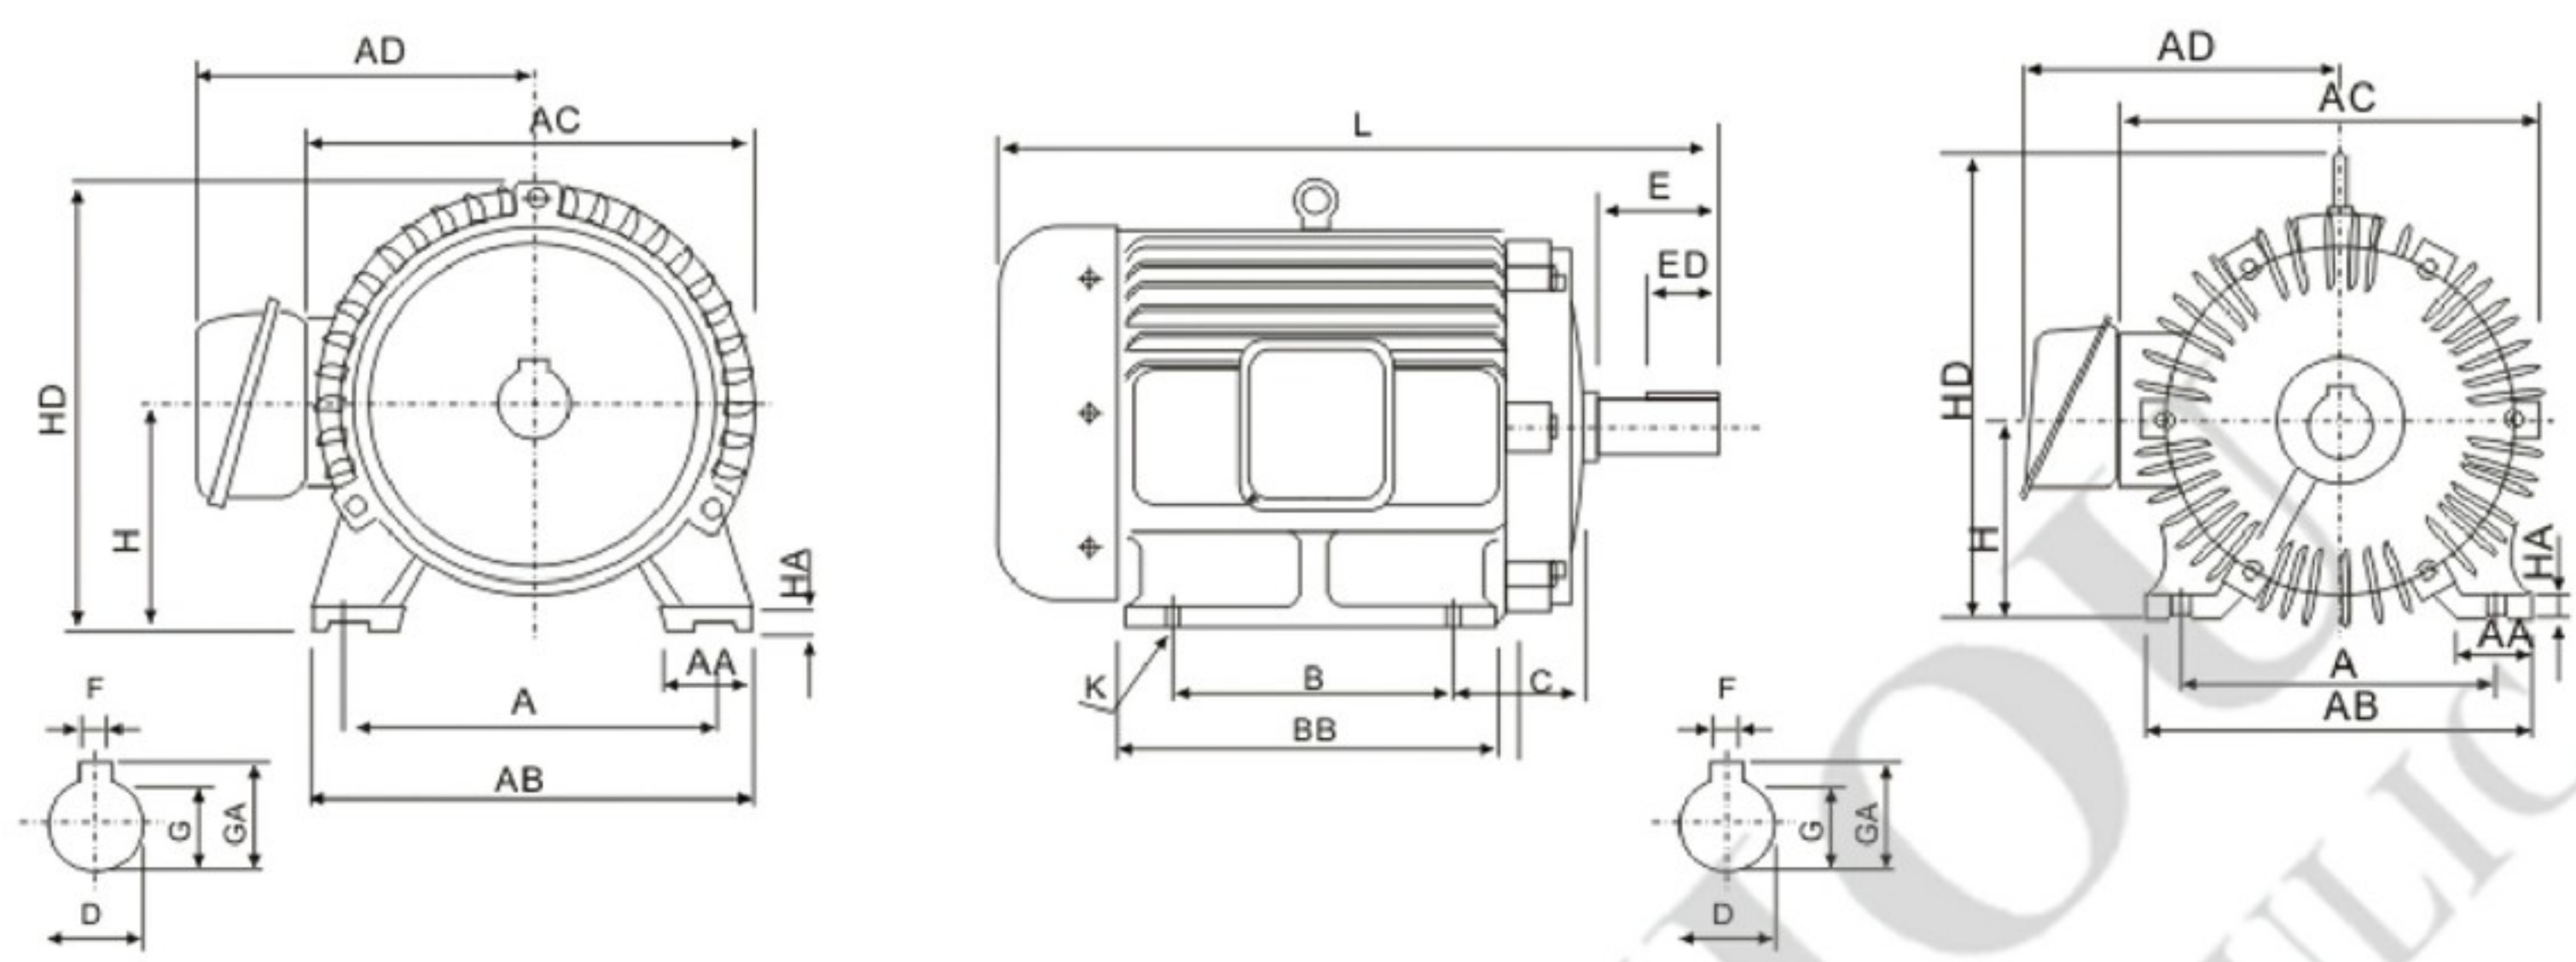

图三


单位unit :mm

C	H	HA	HD	K	L	轴 端 Shaft end						净重kg net weight
						D	E	ED	F	G	GA	
45	71	8	153	7	257	14	30	14	5	11	16	13
50	80	8	168	10	272	19	40	25	6	15.5	21.5	15
56	90	9	190	10	322	24	50	32	8	20	27	22
63	100	10	243	12	363	28	60	40	8	24	31	31.5
70	112	12.5	265	12	382	28	60	40	8	24	31	38
89	132	14	310	12	412	38	80	56	10	33	41	59.5
89	132	16	310	12	456	38	80	56	10	33	41	69
108	160	16	377	15	604	42	110	80	12	37	45	112
108	160	18	377	15	648	42	110	80	12	37	45	105
121	180	18	421	15	667	48	110	80	14	42.5	51.5	180
121	180	20	421	15	705	55	110	80	16	42.5	59	238
48	80	8	177	10	245	16	40	25	6	15.5	19	15
50	100	9	200	10	322	22	50	40	8	20	25	24
60	90	9	200	10	350	24	60	40	8	22	27	27.5
70	112	12.5	265	12	385	28	60	40	8	24	31	42.5
70	112	12.5	265	12	420	28	60	40	8	24	31	47.5

世界主要国家或地区电压周率表 Voltage Table


地区国别 Regional country		周率 HZ	电压(V) Voltage (V)	
中文 Chinese	英文 English		单相 Single phase	三相 Three phase
阿富汗	Afghanistan	50	220	220/380
阿尔及利亚	Algeria	50	127/220	220/380
阿根廷	Argentina	50	220	220/380
澳洲	Australia	50	240	240/415
奥地利	Austria	50	220	220/380
巴哈马	Bahamas	50	120	120/208
比利时	Belgium	50	127/220	220/380
巴西	Brazil	50	110/220	220/380
		60	127	230/440
缅甸	Myanmar	50	230	220/380
高棉	Rouge	50	120	220/240/480
加拿大	Canada	60	110/120	220/380
智利	Chile	50	220	220/380
中国大陆	China	50	220	220/380
哥伦比亚	Colombia	60	110/220	240
歌斯大黎加	Adams song great Rica	60	120/240	240
古巴	Cuba	60	115/120	220/380
捷克	Czech Republic	50	120/220	220/380
丹麦	Denmark	50	220	220
多米尼加	Dominica	60	110/220	220/380
埃及	Egypt	50	220	220/380
芬兰	Finland	50	220	220/380
法国	France	50	115/220/127	220/380
德国	Germany	50	110/220	220/380
希腊	Greece	50	220	220/380
希陵兰	Greek Ling Lan	50	220	220/240
瓜地马拉	Guatemala	60	120/127/220	220
宏都拉斯	Honduras	50	110/220	220/346
香港	Hong Kong	50	110/220/230	220/380
匈牙利	Hungary	50	220	220/380
冰岛	Iceland	50	220	220/380
印度	India	50	220	220/400
地区国别 Regional country		周率 HZ	电压(V) Voltage (V)	
中文 Chinese	英文 English		单相 Single phase	三相 Three phase
印尼	Indonesia	50	127/200	220/380
伊朗	Iran	50	110/220	220/380
伊拉克	Iraq	50	220	220/380
爱尔兰	Ireland	50	220	220/380
以色列	Israel Lee	50	230	230/400
意大利	Italy	50	127/220	220/380
日本	Japan	50/60	100/200	200
约旦	Jordan	50	220	220/380
韩国	Korea	60	100/200	200
科威特	Kuwait	60	100/200	200
墨西哥	Mexico	50	127/220	220/380
荷兰	Netherlands	50	110/220	220/230
纽西兰	New Zealand	50	230	230/400
尼加拉瓜	Nicaragua	60	120/240	240
挪威	Norway	50	230	230
巴基斯坦	Pakistan	50	230	220/380 230/400
巴拿马	Panama	50	110/220/120	220/240
秘鲁	Peru	60	110/220	220
菲律宾	Philippines	60	110/220	220/400
葡萄牙	Portugal	60	110/190/220	220/380
沙乌地- 阿拉伯	Saudi- Arabia	50 60	127/220	220/380
苏格兰	Scotland	60		230/400
新加坡	Singapore	50	240	240/415
南非共和国	South Africa Rep.	50	115/230	230/400 220/380
西班牙	Spain	50	220/380	220/380
瑞士	Switzerland	50	127/220	220/380
泰国	Thailand	50	220	220/380
土耳其	Turkey	50	110/220	220/380
美国	U. S. A.	60	127/230/220	240/415
英国	United Kingdom	50	120/240	240/415
越南	Viet-Nam	50	2740	240/415
		50	127/220	220/380

MF 型滤油网 MF Type Suction Filter

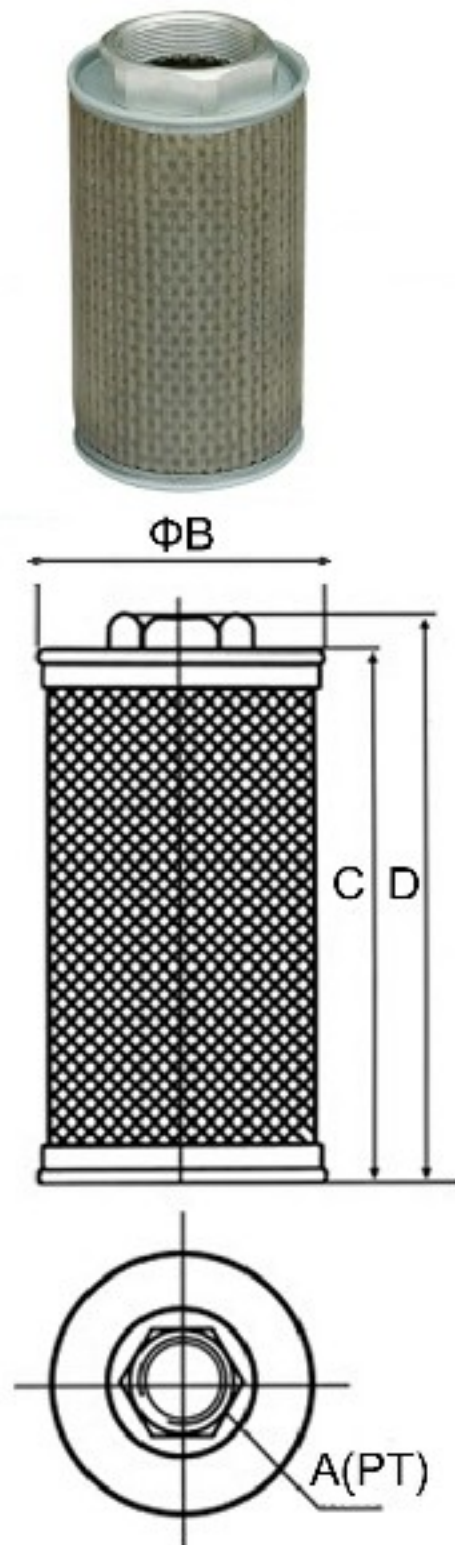

型号 Model	口径 A(PT)	B (mm)	C (mm)	D (mm)	流量 Flow (l/min)	过滤精度 Filtration mesh	重量 Weight (kg)
MF-02	1/4"	55	82	90	25	100	0.08
MF-03	3/8"	55	82	90	25		0.08
MF-04	1/2"	66	82	90	35		0.09
MF-06	3/4"	66	122	132	60		0.14
MF-08	1"	66	142	152	110		0.17
MF-10	1-1/4"	66	162	176	210		0.19
MF-12	1-1/2"	82	182	196	260		0.25
MF-16	2"	103	182	197	390		0.36
MF-20	2-1/2"	115	232	135	600		1.14
MF-24	3"	135	232	235	700		1.2
MF-32	4"	158	250	270	900		1.8


加油口 Filler Breather Filter

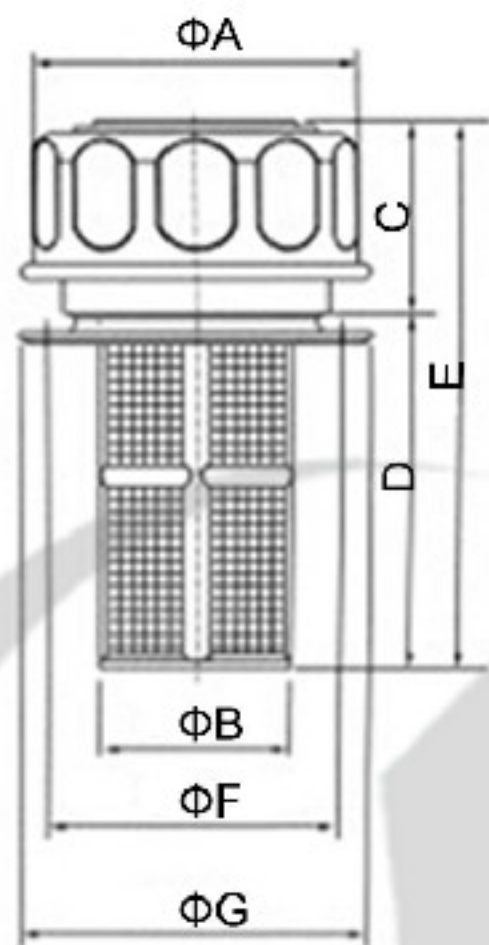

型号 Model	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	DX空数 Hole	过滤精度 Filtration mesh	重量 Weight (kg)
AB-1162	54	31	31	68	99	45.5	57	30	50	0.08
AB-1163	81	48	47	90	132	71	99	87	50	0.21



油面温度计 Fluid Level& Temperature Gauges

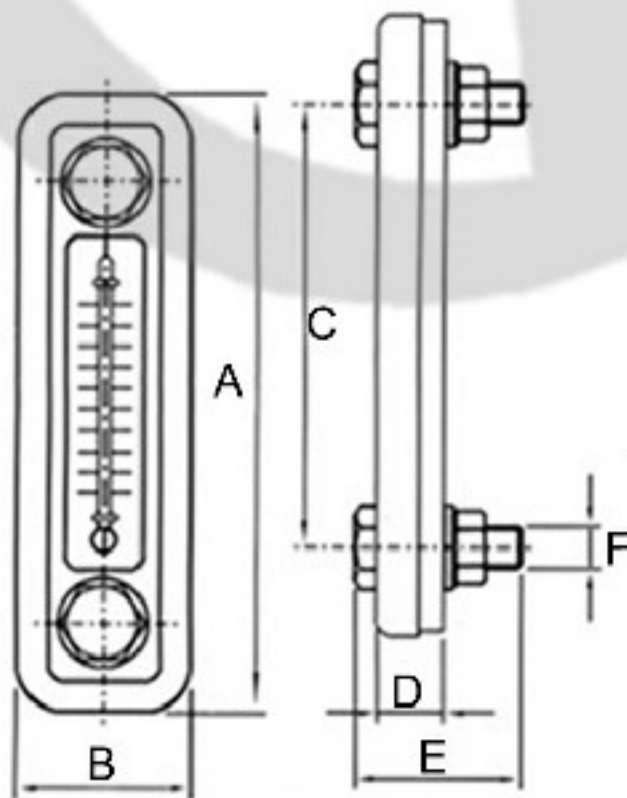

型号 Model	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	重量 Weight (kg)
LS-3"	118	41	80	16.5	39	M10	0.19
LS-5"	178	50	127	19	47	M12	0.35

耐震压力表 Pressure Gauge



LA	63	A	50	(PT 1/4")
系列号码 Series number	表面尺寸 Surface size (mm)	安装方式 Mounting type	压力范围 Pressure range (bar)	接头螺纹&尺寸 Joint thread&Size
耐震压力表 LA: 充油表不带边 Oil Pressure Gauge without Roll Ring Bezel LB: 充油表带边 Oil Pressure Gauge with Roll Ring Bezel	40, 50, 63 100, 150, 200,250	A: 径向 Radial B: 轴向 Axial	10,50,70,100, 150,250,350, 400,600,700, 1000	接头螺纹&尺寸 Joint thread&Size

压力表开关 Pressure Gauge Switch



KF-02/KF-03

GCT-**
(Sliver Color 180°)

GCLT-**
(Sliver Color 90°)


型号 Model	口径 PT	A (mm)	B (mm)	H (mm)	流量 Flow (l/min)	最高压力 Max.pressure (kg)f/cm ²	重量 Weight (kg)
GCT-02	1/4"	22	48	85	3	250	0.23
GCLT-02	1/4"	22	40	99	3	250	0.24
GCT-03	3/8"	26	52	92	21	250	0.24
GCLT-03	3/8"	26	65	98	21	250	0.23

回油滤清器 Oil Filter




RFA		-100		x10		L		C			
型号Model		公称流量(L/min) Nominal flow		过滤精度(μm) Filtration Accuracy		出油口连接方式 Discharge Port Connection		发讯器 Indicator			
RFA微型直回式回油过滤器 RFA Tank mounted min-type return filter		25,40,63,100, 160,250,400, 630,800,1000		1,3,4,10,20,30		L:出油口螺纹型 Thread Discharge Port F:出油口法兰型 Flange Discharge Port		省略Omit:无No Y:带CYB-I型发讯器≤DC24V With CYB-I indicator C:带CY-II型发讯器≤220V With CY-II indicator			
型号 Model	公称流量 (L/min) Nominal flow	过滤精度(μm) Filtration Accuracy	通径 Size	压力(Mpa) Pressure	压力损失 Press. loss		发讯装置 Indicator		重量 (Kg) Weight	滤芯型号 Model of element	
					开启 Open	最大 Max	V	A			
RFA-25x*L-	25	1 3 5 10 20 30	15	1.6	≤0.075	0.35	12 24 36 220	2.5 2 1.5 0.25	0.85	FAX-25x*	
RFA-40x*L-	40		20						0.9	FAX-40x*	
RFA-63x*L-	63		25						1.5	FAX-63x*	
RFA-100x*L-	100		32						1.7	FAX-100x*	
RFA-160x*L-	160		40						2.7	FAX-160x*	
RFA-250x*L-	250		50						4.35	FAX-250x*	
RFA-400x*L-	400		65						6.15	FAX-400x*	
RFA-630x*L-	630		90						8.2	FAX-630x*	
RFA-800x*L-	800		90						8.9	FAX-800x*	
RFA-1000x*L-	1000		90						9.96	FAX-1000x*	
SP		-06		x10		H					
型号		口径 Nom.Dia.		过滤精度 Filtration Accuracy (μm)		类型Type					
SP旋转式过滤器 Spin-on Filter SPH过滤器滤头 Filter Head SPX过滤器滤芯 Element		06:Rc3/4 10:Rc 1¼		10μm 25μm		H: 回油过滤器 Oil return Filter J: 吸油过滤器 Oil Suction Filter					

KC管式单向节流阀 Tube Type Check Valve

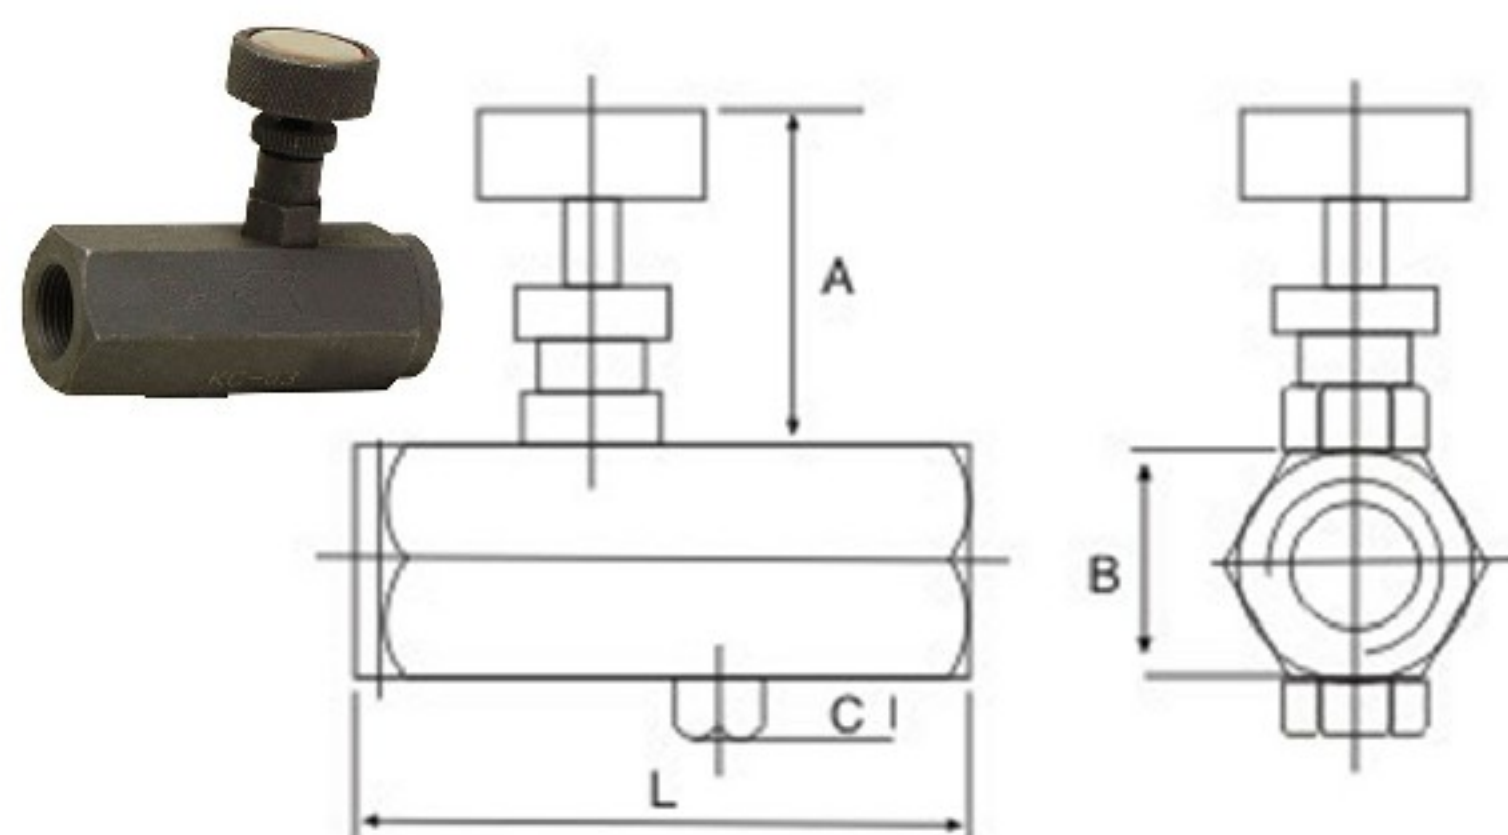

型号 Model	口径 Size PT	A mm	B mm	C mm	L mm	流量 Flow L
KC-02	1/4"	38	24	7	62	12
KC-03	3/8"				70	20
KC-04	1/2"	44	32	10	81	30
KC-06	3/4"	48	40	14	92	48
KC-08	1"		44		96	60

CSBF船阀 CSBF Marine Valve

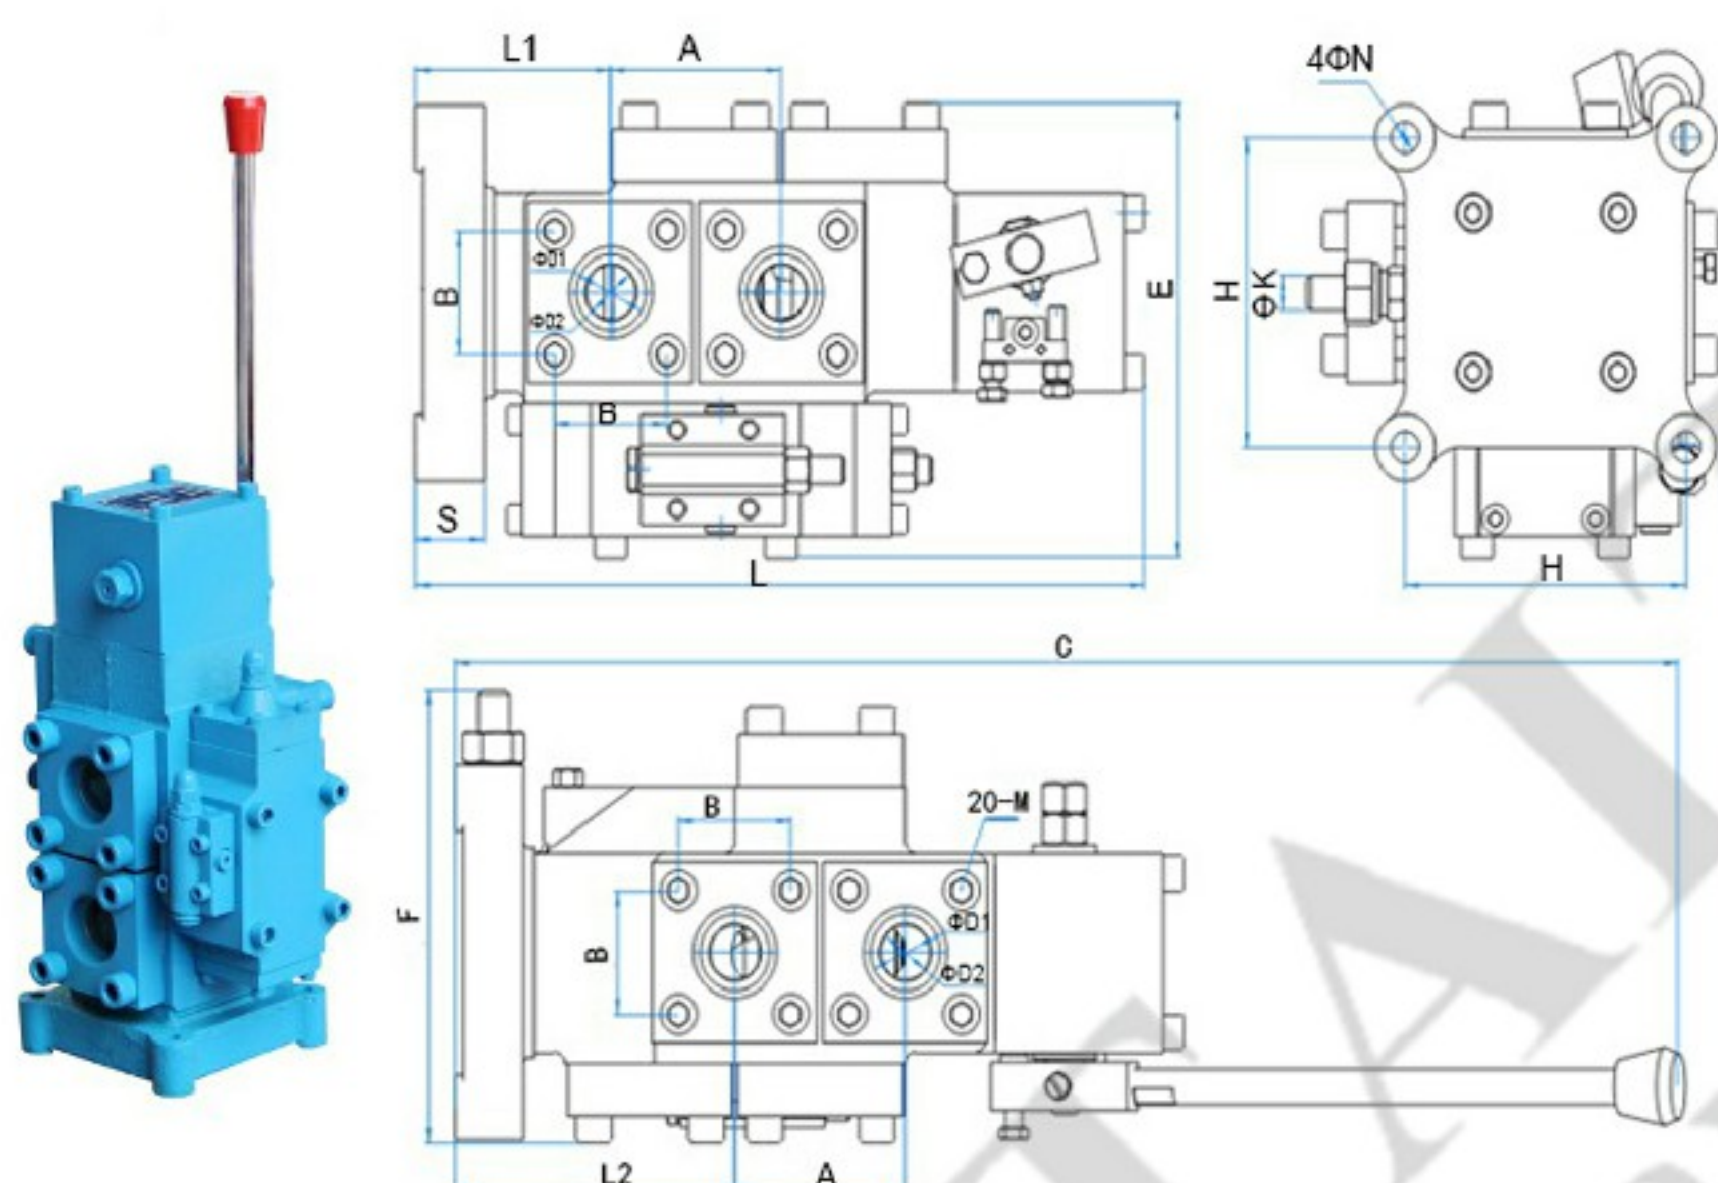

型号 Model	CSBF-G-25	CSBF-G-32	CSBF-G-40
A	85	88	105
B	56	60	72
C	610	670	780
D1	Φ34.5	Φ42	Φ50
D2	Φ25.5	Φ32	Φ40
E	206	220	240
F	205	220	240
H	140	120	140
K	Φ16	Φ16	Φ16
M	M12*40	M14*40	M16*40
N	Φ13	Φ11	Φ12
L	363	390	430
L1	97	115	115
L2	139	160	165
S	34	34	40

液压动力单元 Hydraulic Power Unit

高压球阀 High Pressure Ball Valve



配件 Parts

