



MF 型滤油网 MF Type Suction Filter

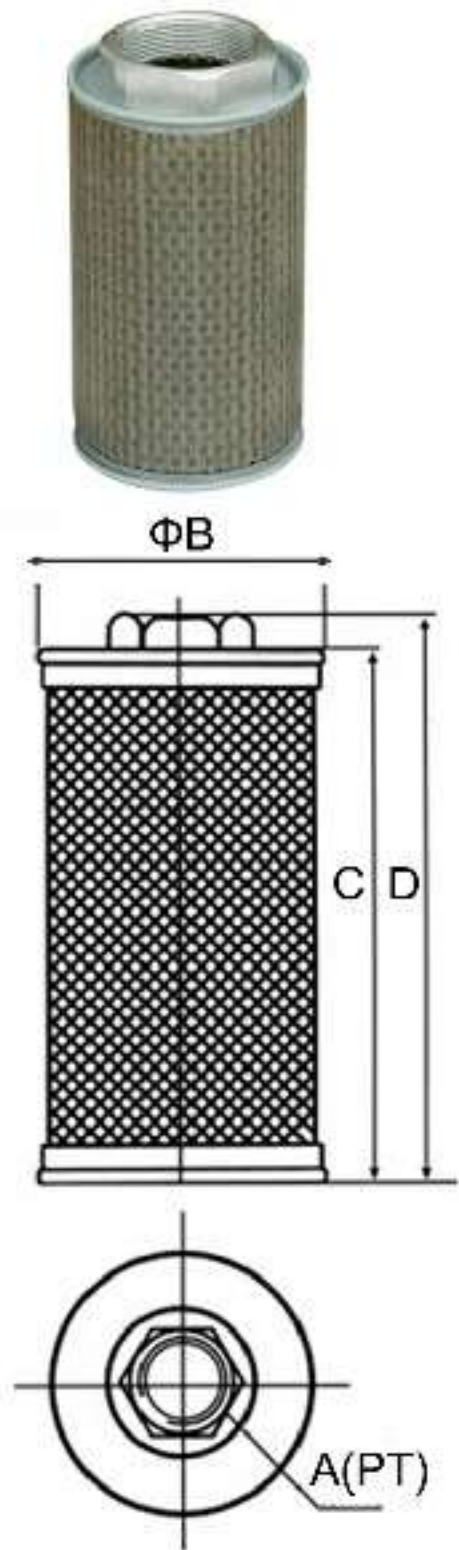

型号 Model	口径 A(PT)	B (mm)	C (mm)	D (mm)	流量 Flow (l/min)	过滤精度 Filtration mesh	重量 Weight (kg)
MF-02	1/4"	55	82	90	25	100	0.08
MF-03	3/8"	55	82	90	25		0.08
MF-04	1/2"	66	82	90	35		0.09
MF-06	3/4"	66	122	132	60		0.14
MF-08	1"	66	142	152	110		0.17
MF-10	1-1/4"	66	162	176	210		0.19
MF-12	1-1/2"	82	182	196	260		0.25
MF-16	2"	103	182	197	390		0.36
MF-20	2-1/2"	115	232	135	600		1.14
MF-24	3"	135	232	235	700		1.2
MF-32	4"	158	250	270	900		1.8


加油口 Filler Breather Filter

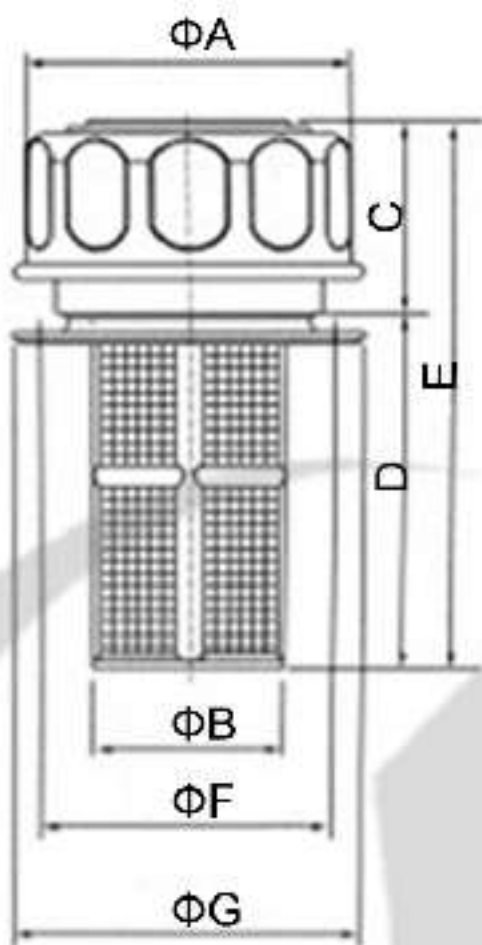

型号 Model	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	DX空数 Hole	过滤精度 Filtration mesh	重量 Weight (kg)
AB-1162	54	31	31	68	99	45.5	57	30	50	0.08
AB-1163	81	48	47	90	132	71	99	87	50	0.21



油面温度计 Fluid Level& Temperature Gauges

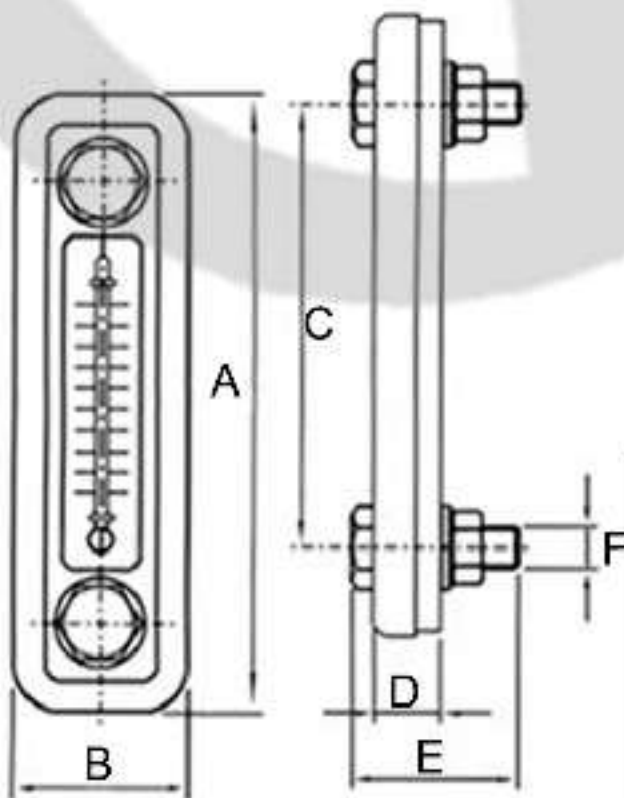

型号 Model	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	重量 Weight (kg)
LS-3"	118	41	80	16.5	39	M10	0.19
LS-5"	178	50	127	19	47	M12	0.35

耐震压力表 Pressure Gauge



LA	63	A	50	(PT 1/4")
系列号码 Series number	表面尺寸 Surface size (mm)	安装方式 Mounting type	压力范围 Pressure range (bar)	接头螺纹&尺寸 Joint thread&Size
耐震压力表 LA: 充油表不带边 Oil Pressure Gauge without Roll Ring Bezel LB: 充油表带边 Oil Pressure Gauge with Roll Ring Bezel	40, 50, 63 100, 150, 200,250	A: 径向 Radial B: 轴向 Axial	10,50,70,100, 150,250,350, 400,600,700, 1000	接头螺纹&尺寸 Joint thread&Size

压力表开关 Pressure Gauge Switch




型号 Model	口径 PT	A (mm)	B (mm)	H (mm)	流量 Flow (l/min)	最高压力 Max.pressure (kg)f/cm²	重量 Weight (kg)
GCT-02	1/4"	22	48	85	3	250	0.23
GCLT-02	1/4"	22	40	99	3	250	0.24
GCT-03	3/8"	26	52	92	21	250	0.24
GCLT-03	3/8"	26	65	98	21	250	0.23

回油滤清器 Oil Filter




RFA		-100	x10	L				C		
型号Model		公称流量(L/min) Nominal flow	过滤精度(μm) Filtration Accuracy	出油口连接方式 Discharge Port Connection				发讯器 Indicator		
RFA微型直回式回油过滤器 RFA Tank mounted min-type return filter		25,40,63,100, 160,250,400, 630,800,1000	1,3,4,10,20,30	L:出油口螺纹型 Thread Discharge Port F:出油口法兰型 Flange Discharge Port				省略Omit:无No Y:带CYB-I型发讯器≤DC24V With CYB-I indicator C:带CY-II型发讯器≤220V With CY-II indicator		
型号 Model	公称流量 (L/min) Nominal flow	过滤精度(μm) Filtration Accuracy	通径 Size	压力(Mpa) Pressure	压力损失 Press. loss		发讯装置 Indicator		重量 (Kg) Weight	滤芯型号 Model of element
					开启 Open	最大 Max	V	A		
RFA-25x*L-	25	1 3 5 10 20 30	15	1.6	≤0.075	0.35	12 24 36 220	2.5 2 1.5 0.25	0.85	FAX-25x*
RFA-40x*L-	40		20						0.9	FAX-40x*
RFA-63x*L-	63		25						1.5	FAX-63x*
RFA-100x*L-	100		32						1.7	FAX-100x*
RFA-160x*L-	160		40						2.7	FAX-160x*
RFA-250x*L-	250		50						4.35	FAX-250x*
RFA-400x*L-	400		65						6.15	FAX-400x*
RFA-630x*L-	630		90						8.2	FAX-630x*
RFA-800x*L-	800		90						8.9	FAX-800x*
RFA-1000x*L-	1000		90						9.96	FAX-1000x*
SP		-06	x10				H			
型号		口径 Nom.Dia.	过滤精度 Filtration Accuracy (μm)				类型Type			
SP旋转式过滤器 Spin-on Filter SPH过滤器滤头 Filter Head SPX过滤器滤芯 Element		06:Rc3/4 10:Rc 1 1/4	10μm 25μm				H: 回油过滤器 Oil return Filter J: 吸油过滤器 Oil Suction Filter			

KC管式单向节流阀 Tube Type Check Valve

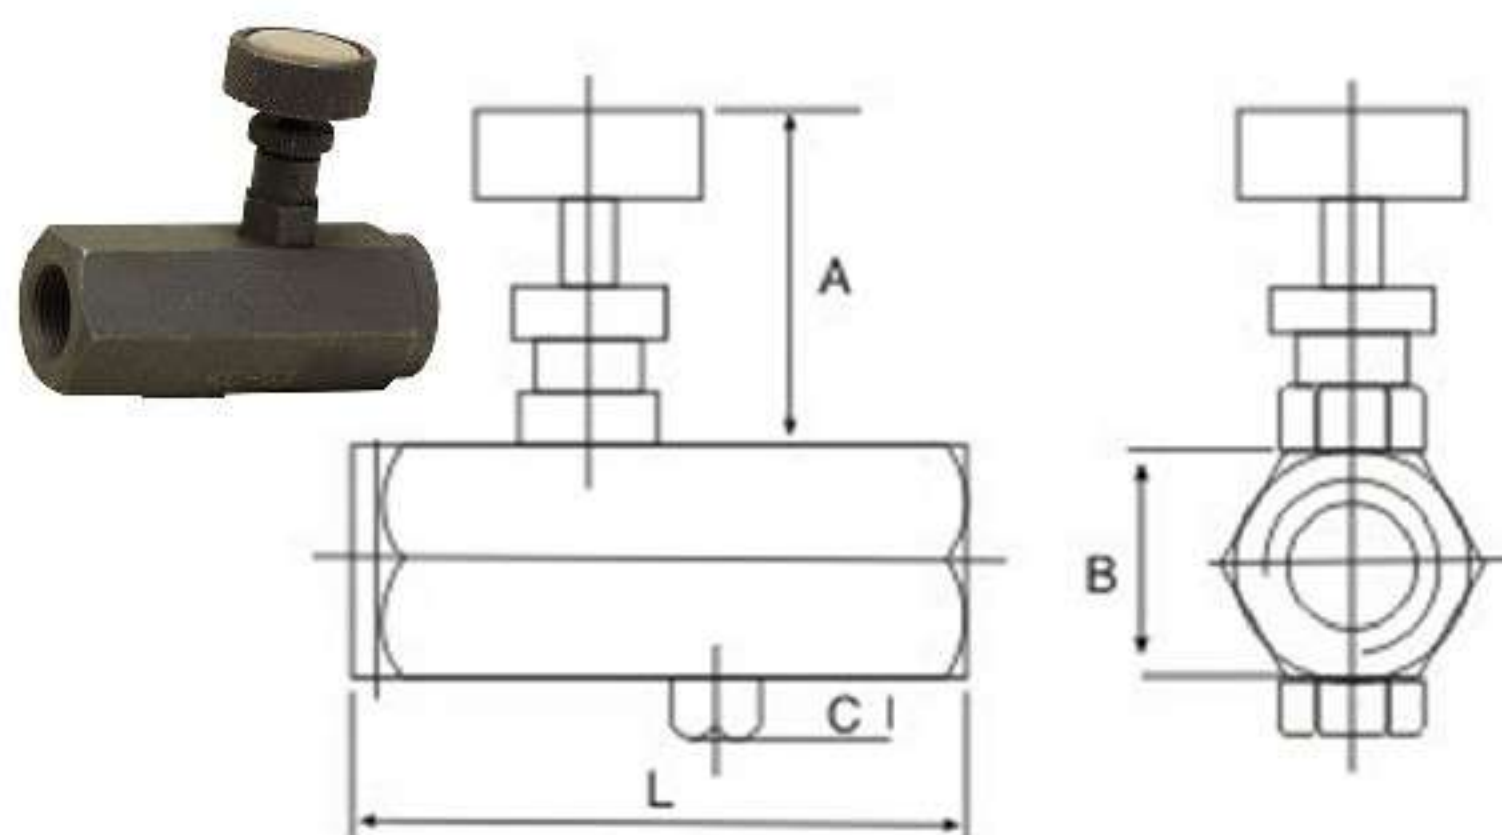

型号 Model	口径 Size PT	A mm	B mm	C mm	L mm	流量 Flow L
KC-02	1/4"	38	24	7	62	12
KC-03	3/8"				70	20
KC-04	1/2"	44	32	10	81	30
KC-06	3/4"	48	40	14	92	48
KC-08	1"		44		96	60

CSBF船阀 CSBF Marine Valve

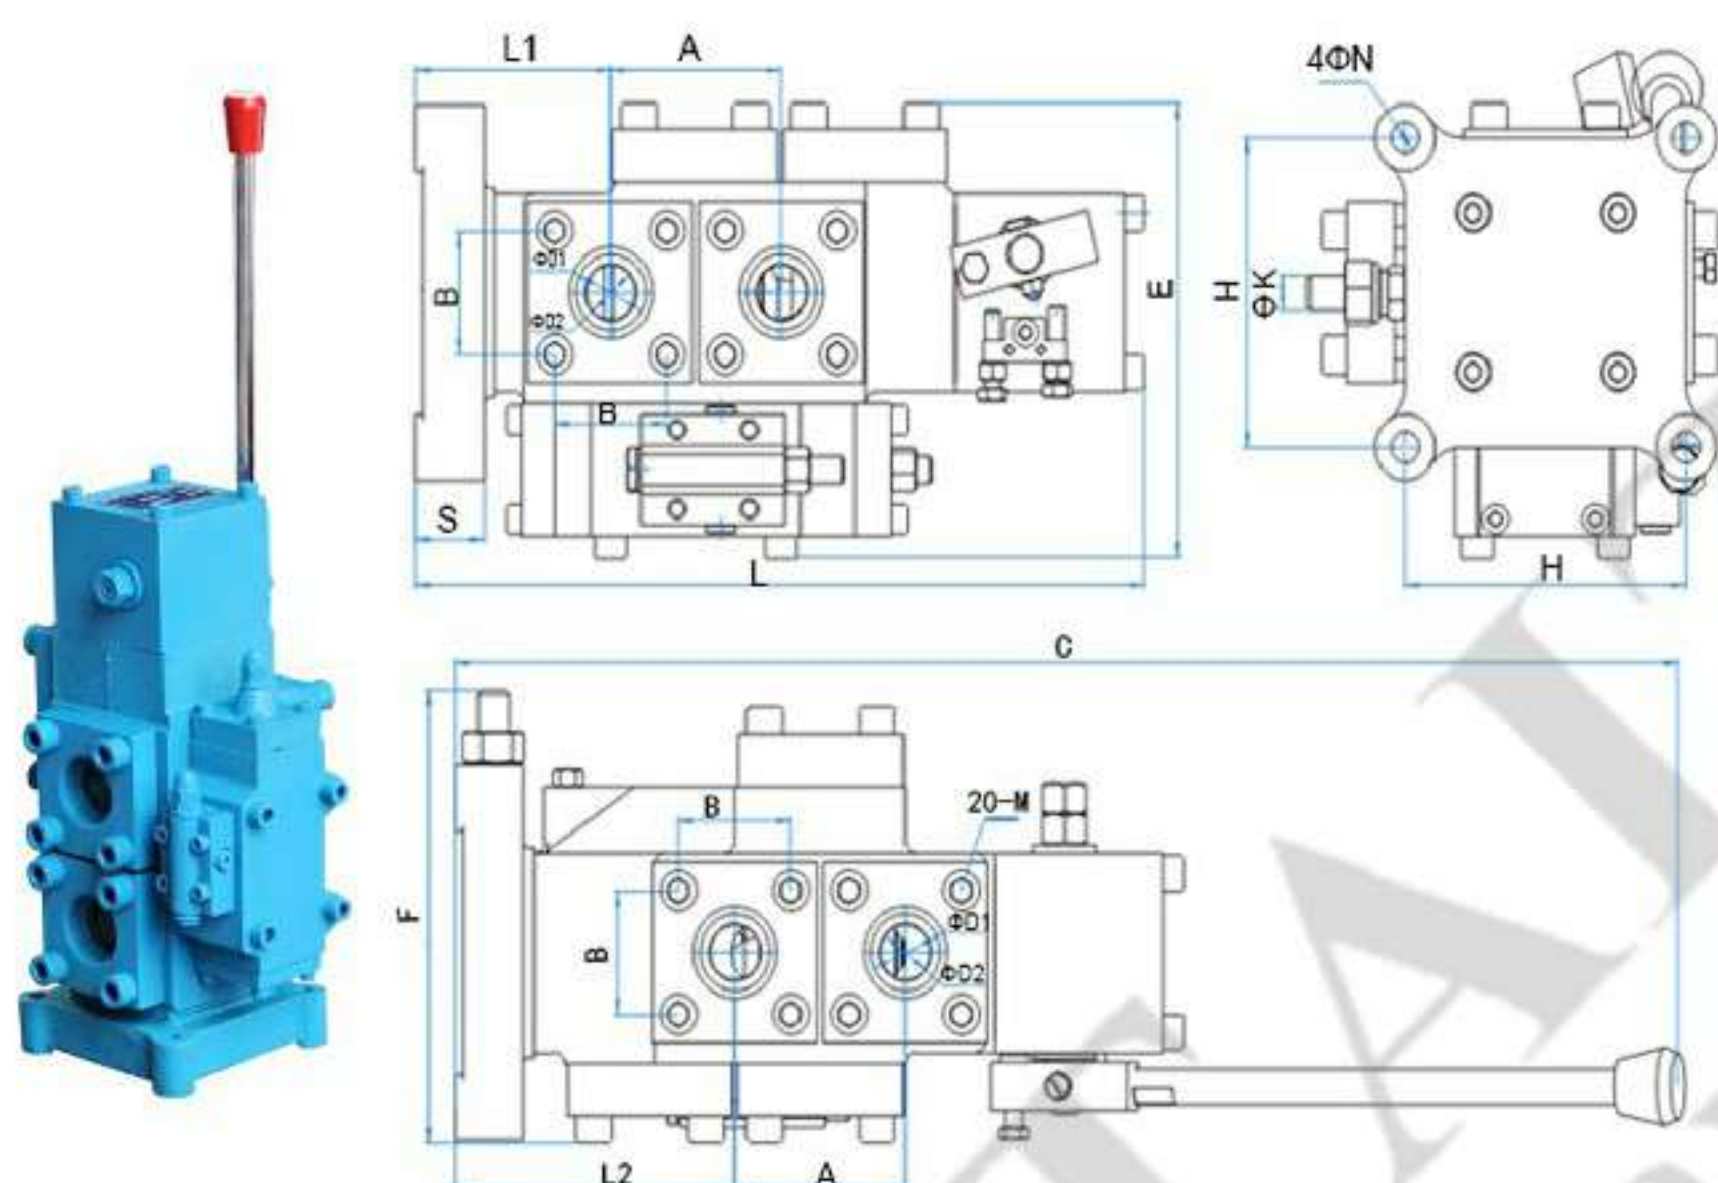

型号 Model	CSBF-G-25	CSBF-G-32	CSBF-G-40
A	85	88	105
B	56	60	72
C	610	670	780
D1	Φ34.5	Φ42	Φ50
D2	Φ25.5	Φ32	Φ40
E	206	220	240
F	205	220	240
H	140	120	140
K	Φ16	Φ16	Φ16
M	M12*40	M14*40	M16*40
N	Φ13	Φ11	Φ12
L	363	390	430
L1	97	115	115
L2	139	160	165
S	34	34	40

液压动力单元 Hydraulic Power Unit

高压球阀 High Pressure Ball Valve



配件 Parts

